










CARE AND MAINTENANCE

Wipe clean with a soft, dry cloth. Test the cleaning method on a hidden area before using them over the entire area.

NOTICE

- * Please make sure that you have all parts indicated before you begin assembly of this item.
- * This item should be assembled on a soft surface to prevent scratching the finished product during assembly.
- * This item may require periodic tightening.
- * Do not tighten bolts until completely assembled.


Part List and Hardware List

PIECE	DESCRIPTION	PICTURE	QUANTITY
A	Shelf		4x
B	Side Frame		2x
C	Connecting bar		8x
D	Connecting bar		2x
E	Connecting bar		2x
H1	Allen Bolt	 1/4"x5/8"	16x
H2	Allen Bolt	 1/4"x1-1/4"	32x
H3	Allen Key	 M4	1x
H4	Anti-Tip Hardware		2x

 **SAFAVIEH**
FURNITURE

Model# ETG6200

Product Dimensions: 30"W*14"Dx72"H

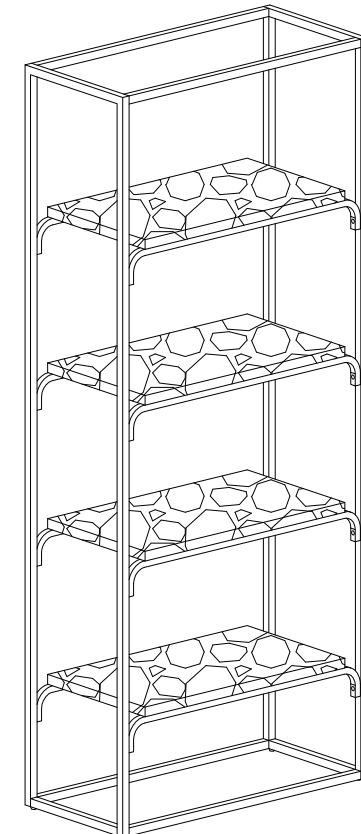


PREPARATION

Before beginning assembly of product, make sure all parts are present. Compare parts with package contents list and hardware contents list. If any part is missing or damaged, do not attempt to assemble the product.

Estimated Assembly Time: 30 minutes.

Tools Required for Assembly (included): Allen Key

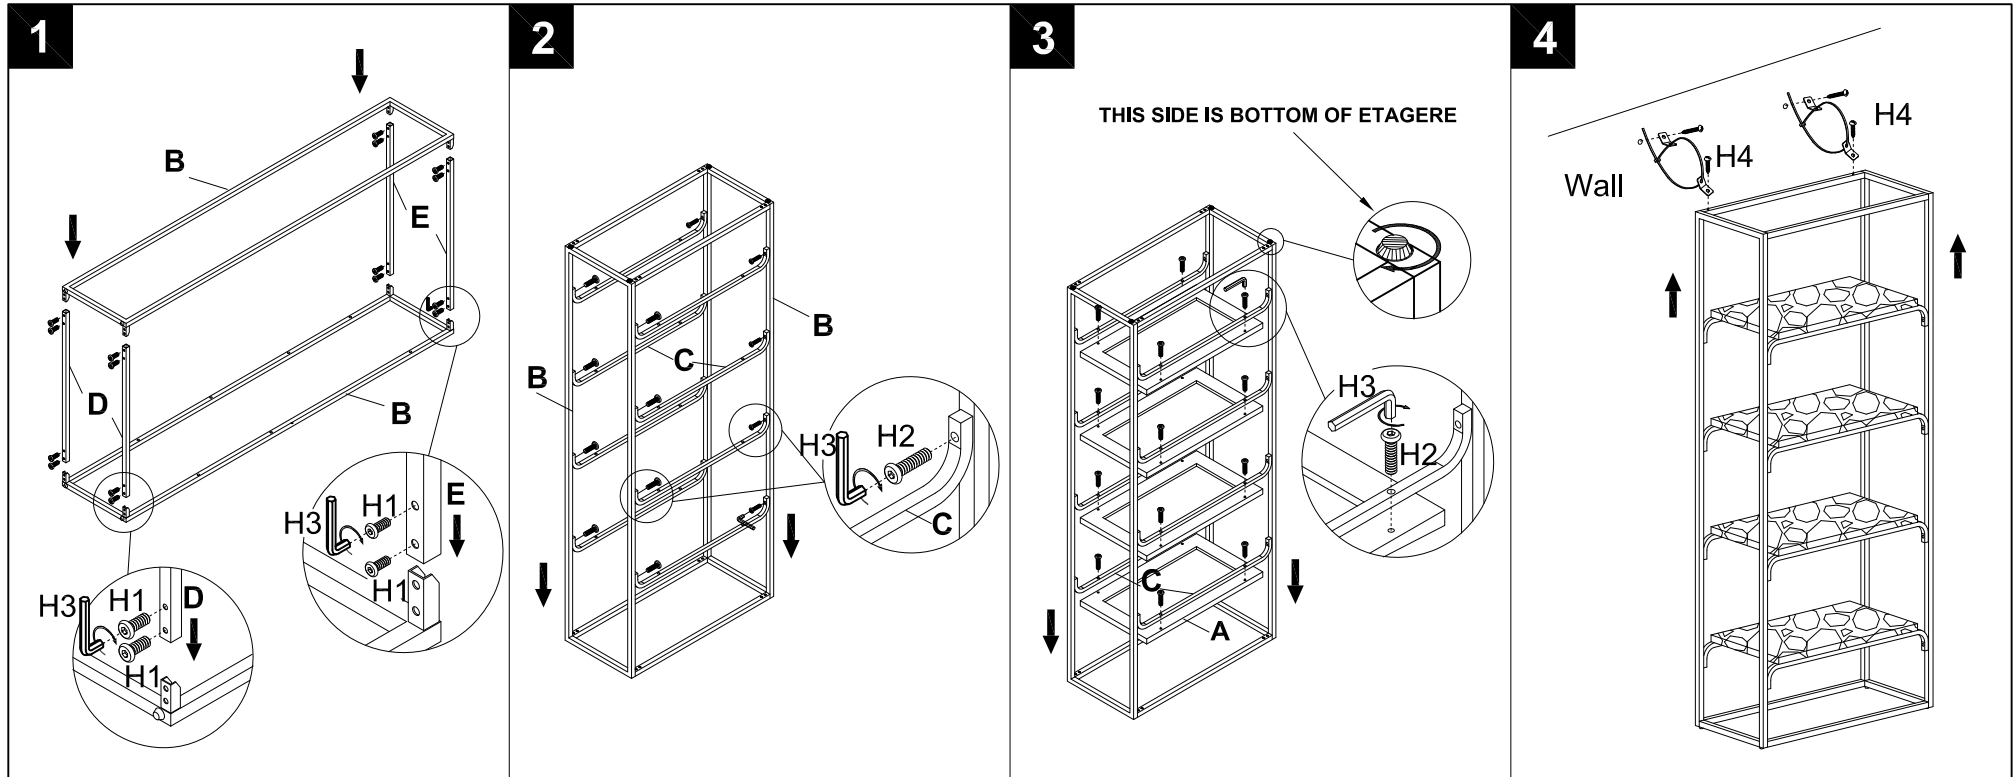

Step 1

Attach 4*connecting bars (2*D & 2*E) to the both ends of 2*side frame (B), Use Allen Key (H3) to lock through holes on connecting bars with 16*Allen bolts (H1).

Step 2

Attach 8*connecting bars (C) to the assembled rack frame and aligning, Use Allen Key (H3) to lock 16*Allen bolts (H2), as picture.

Step 3

Attach underneath of 4*wood shelf (A) to the assembled connecting bar (C), Use Allen Key (H3) to lock 16*Allen bolts (H2).

Step 4

Straighten up the assembled rack, following the Installation Instructions of anti-tipping to fix the rack with wall by 2 straps, Assembly is completed.