## WARNING

** WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN **
* Switch off the main electrical supply from the main fuse box / circuit breaker before installation.
* Inspect item carefully before attempting to install.
* If there is any damages or obvious defects, do not install.
* Item may not be returned once it has been installed

## CARE AND MAINTENANCE


* To clean the outside of the fixture, use a dry or slightly dampened clean cloth (use clean water, never a solvent) to wipe the surface of the fixture.
* To clean the inside of the fixture, first disconnect power to the fixture by turning off the circuit breaker or by removing the fuse at the fuse box. Next, use a dry or slightly dampened clean cloth (use clean water, never a solvent) to wipe the interior surface of the fixture.
* Do not use any cleaners with chemical, solvents or harsh abrasives. Use only a dry soft cloth to dust or wipe carefully.

## NOTICE& IMPORTANT SAFETY INSTRUCTIONS



* Please make sure that you have all parts indicated before you begin assembly of this item
* This item should be assembled on a soft surface to prevent scratching the finish during assembly
* To reduce the risk of fire, electrical shock or injury to persons or property, please follow the guideline below for safe use and installation
*The external flexible cable or cord of this luminaire cannot be replaced
If the cord is damaged, the luminaire shall be destroyed

SAFAVIEH
COUTURE

Model#:CTL1022A
Product Dimensions:18.25"LX18.25W X 13.5"H

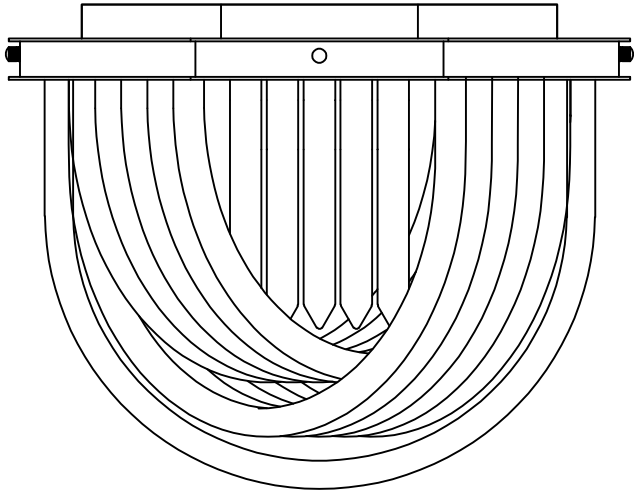


## Part List and Hardware List

| PIECE | DESCRIPTION | PICTURE | QUANTITY | PIECE | DESCRIPTION | PICTURE | QUANTITY |
|---|---|---|---|---|---|---|---|
| A | Mounting Plate |  | 1X | H | Octagon Lamp Frame |  | 1X |
| B | Wire Connector |  | 3X | I | Coronet Screw |  | 4X |
| C | Mounting Screw (5/32-32T*25) |  | 2X | J1 | Bend Glass Bar |  | 5X |
| D | Expanded Colloidal Particles |  | 4X | J2 | Bend Glass Bar |  | 5X |
| E | Tapping Screw M4*0.7*25 |  | 4X | J3 | Bend Glass Bar |  | 5X |
| F | Screwed Ball |  | 40X | J4 | Bend Glass Bar |  | 5X |
| G | Light Body |  | 1X | K | Bulb |  | 6X |


## PREPARATION

* Before beginning assembly of product, make sure all parts are present. Compare parts with package contents list and hardware contents list.
* If any part is missing or damaged, do not attempt to assemble the product.
* Estimated Assembly Time: 20 minutes.
* If you are having difficulty, our friendly Customer Care team is always here to help. Please email customersupport@safavieh.com


**NOTE:PLEASE USE ON/OFF TYPE"B" BULB MAX 25-WATT OR CFL BULB MAX 13-WATT OR LED BULB MAX 9-WATT THERE IS LED 4-WATT BULB IN THE BOX**

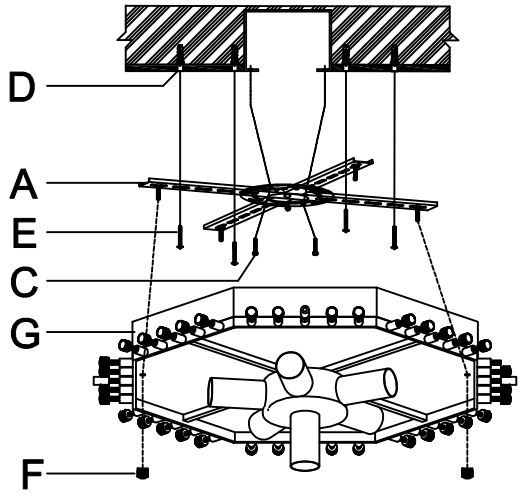



**Step 1**:Unpack all parts from cartons carefully.
Separate the Mounting Plate(A) from the Lamp Body(G) by removing the Canopy Nut(F) anti-clockwise.

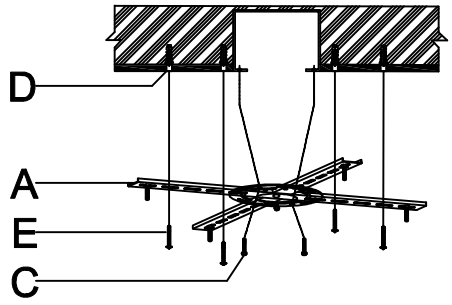



**Step 2:**Attach the Mounting Plate (A) onto the J-box and secure it by turning 2 Mounting Screw(C) clockwise till tight.
Insert each Anchor Screw(E) into each Anchor(D).

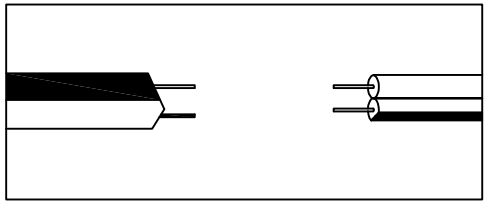

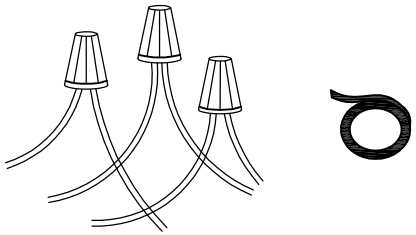


**Step 3:Wire connection**


Connect fixture neutral wire (ribbed) to the outlet box neutral wire (usually white) using a wire nut.
Connect fixture hot wire (smooth with markings) to the outlet box hot wire (usually black) using a wire nut.
CAUTION: Do not reverse the hot and neutral connections
Grounding Instructions:
Wrap ground wire from outlet box around green ground screw(B) on mounting bracket, no less than 2" from wire end. Tighten ground screw. If fixture is supplied with a ground wire, connect to outlet ground wire with a wire connector.

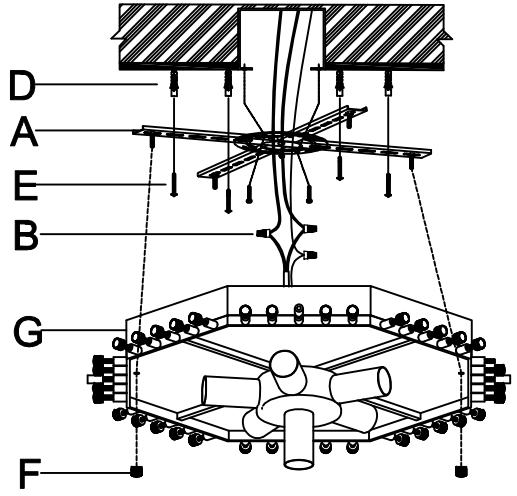


**Step 4**:Attach the Canopy of the Lamp Body(G) to the Mounting Plate (A) and fix it with Canopy Nut (F).

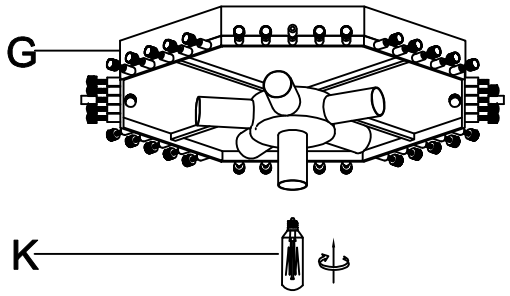


**Step 5**:Insert the bulb (K) into the Socket.
Be sure to use light bulb(K) with wattage no greater than specified on this fixture.
Make sure that electrical current is turned off before changing bulbs.

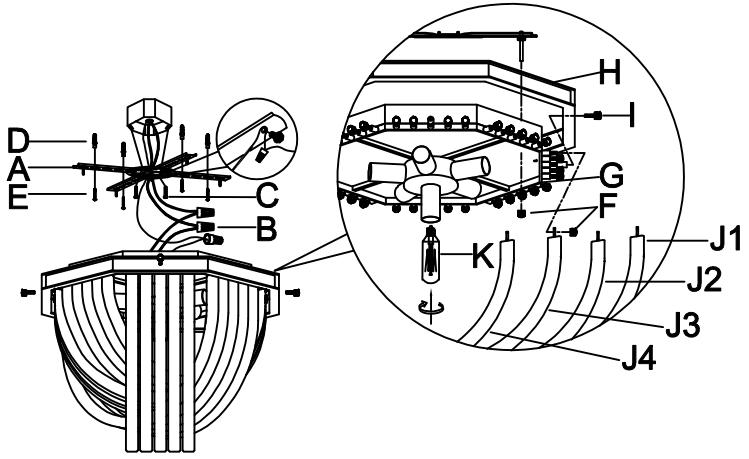


**Step 6**:Put curved triangle glass bar (J1) (J2) (J3) (J4) according to the length, and then install to the lamp body (G), and then tighten with screw cap (F).
Put the octagonal lamp frame (H) on the lamp body (G) and lock it with the crown screw (I).