WARNING

* Switch off the main electrical supply from the main fuse box / circuit breaker before installation.
* Inspect item carefully before attempting to install.
* If there is any damages or obvious defects, do not install.
* Item may not be returned once it has been installed.




CARE AND MAINTENANCE

* To clean the outside of the fixture, use a dry or slightly dampened clean cloth (use clean water, never a solvent) to wipe the surface of the fixture.
* To clean the inside of the fixture, first disconnect power to the fixture by turning off the circuit breaker or by removing the fuse at the fuse box. Next, use a dry or slightly dampened clean cloth (use clean water, never a solvent) to wipe the interior surface of the fixture.
* Do not use any cleaners with chemical, solvents or harsh abrasives. Use only a dry soft cloth to dust or wipe carefully.

NOTICE& IMPORTANT SAFETY INSTRUCTIONS


** WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN **
* Please make sure that you have all parts indicated before you begin assembly of this item
* This item should be assembled on a soft surface to prevent scratching the finish during assembly
* To reduce the risk of fire, electrical shock or injury to persons or property, please follow the guideline below for safe use and installation
*The external flexible cable or cord of this lamp cannot be replaced
If the cord is damaged, the lamp shall be destroyed






Part List and Hardware List

PIECE	DESCRIPTION	PICTURE	QUANTITY	PIECE	DESCRIPTION	PICTURE	QUANTITY
A	Glass strip		8X	F	Hex nut		3X
B	Glass strip		16X	G	Metal washer		1X
C	Glass strip		16X	H	Threaded rod		1X
D	Glass strip		12X	I	Teeth washer		1X
E	Glass strip		8X	J	Wire Nut		3X

SAFAVIEH COUTURE

Model#: CTL1042
Product Dimensions:51"Lx12"Wx31"-79"H

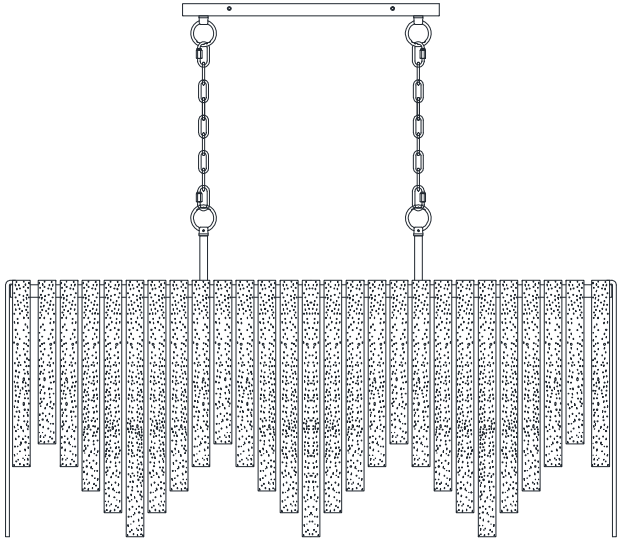


PIECE	DESCRIPTION	PICTURE	QUANTITY	PIECE	DESCRIPTION	PICTURE	QUANTITY	PIECE	DESCRIPTION	PICTURE	QUANTITY
K	Mounting bracket		1X	Q	Cluster		1X	U1	Part		60X
L	Plain washer		2X	R	Canopy		1X	U2	Rubber pad		60X
M	Outlet box screw		2X	S	Chain		2X	V	Bulb		7X
N	Screw		4X	T	Center rod		2X	W	Anchor		4X
O	Steel cable buckle		1X	U	Fixture body		1X	X	Wood screw		4X
P	Steel cable buckle		1X								

PREPARATION

* Before beginning assembly of product, make sure all parts are present. Compare parts with package contents list and hardware contents list.
* If any part is missing or damaged, do not attempt to assemble the product.
* Estimated Assembly Time: 20 minutes.
* Tools Required for Assembly (not included): Screwdriver, Junction box
* If you are having difficulty, our friendly Customer Care team is always here to help. Please email **customersupport@safavieh.com**

NOTE:PLEASE USE TYPE"B" BULB MAX 25-WATT OR LED BULB MAX 5-WATT, THERE ARE LED 4-WATT BULBS IN THE BOX

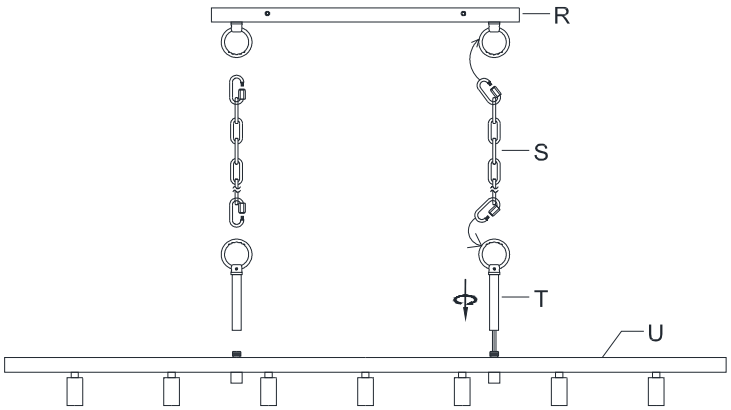


Step 1: Tighten Center rod(T) to Fixture body(U). Pass wire and cable through Chain(S) and Canopy(R),Fix two ends of Chain(S) to Center rod(T) and Canopy(R).

PREPARATION


* Before beginning assembly of product, make sure all parts are present. Compare parts with package contents list and hardware contents list.
* If any part is missing or damaged, do not attempt to assemble the product.
* Estimated Assembly Time: 20 minutes.
* Tools Required for Assembly (not included): Screwdriver, Junction box
* If you are having difficulty, our friendly Customer Care team is always here to help. Please email **customersupport@safavieh.com**

Note: Method of installation for wooden ceilings

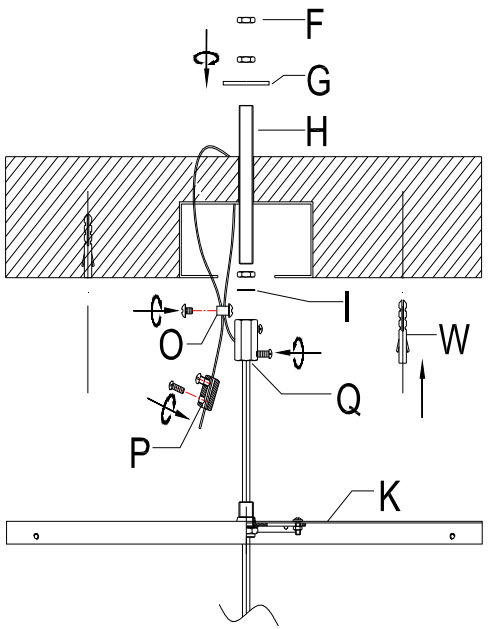

Step 2: Raise the threaded rod (H) and the teeth washer (I)、hex nut (F) thread to the cluster (Q), then attach to the ceiling, secure with metal washer (G) and hex nut (A). Wrap the steel wire rope around the beam and lock it with the steel cable buckle(O) and (P).Determine the position for the mounting bracket (K) and mark the four location holes.Drill a 1/4 in. hole at each marked position, and insert an anchor (W) into each hole.Pass wire and cable through Mounting bracket (K) and out from side hole of Cluster (Q).


Note: Method of installation for cement-based ceilings

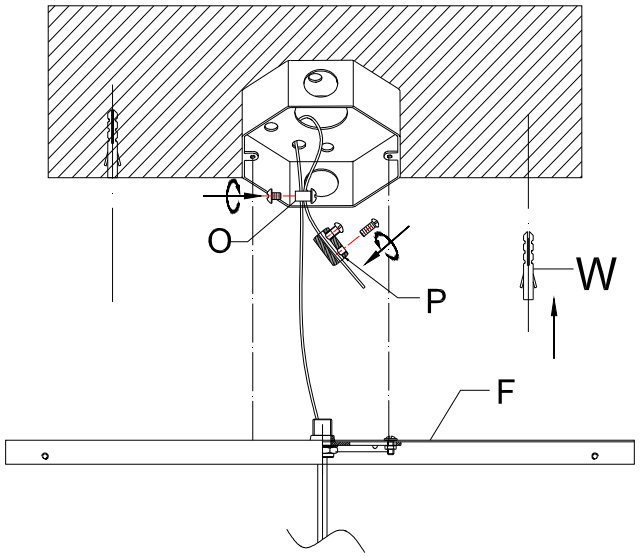


Step 2: Thread the steel rope through the hole in the junction box and lock it with the steel cable buckle(O) and (P).Determine the position for the mounting bracket (K) and mark the four location holes.Drill a 1/4 in. hole at each marked position, and insert an anchor (W) into each hole.Pass wire and cable through Mounting bracket (K) and out from side hole of Cluster (Q).

PREPARATION

* Before beginning assembly of product, make sure all parts are present. Compare parts with package contents list and hardware contents list.
* If any part is missing or damaged, do not attempt to assemble the product.
* Estimated Assembly Time: 20 minutes.
* Tools Required for Assembly (not included): Screwdriver, Junction box
* If you are having difficulty, our friendly Customer Care team is always here to help. Please email **customersupport@safavieh.com**

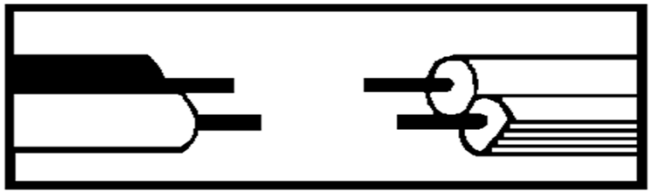




Step 3: Wire connection

Connect fixture neutral wire (ribbed) to the outlet box neutral wire (usually white) using a wire nut.
Connect fixture hot wire (smooth with markings) to the outlet box hot wire (usually black) using a wire nut.
CAUTION: Do not reverse the hot and neutral connections

Grounding Instructions:


Wrap ground wire from outlet box around green ground screw on mounting bracket, no less than 2" from wire end. Tighten ground screw. If fixture is supplied with a ground wire, connect to outlet ground wire with a wire nut.

Note: Method of installation for wooden ceilings

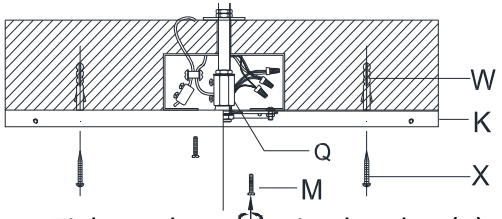


Step4: Tighten the mounting bracket (K) to Cluster (Q), Install the mounting bracket (K) to the junction box with outlet box screw (M)， Secure the mounting bracket (K) to the anchors (W) with the wood screws (X).

Note: Method of installation for cement-based ceilin

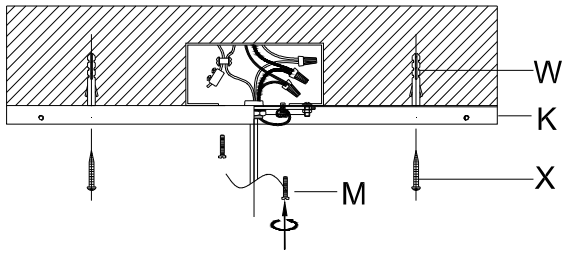


Step4: Install the mounting bracket (K) to the junction box with outlet box screw (M),Secure the mounting bracket (K) to the anchors (W) with the wood screws (X).

Note: Method of installation for wooden ceilings

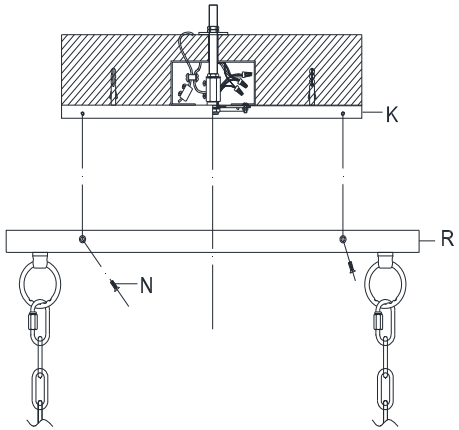

Step 5: Fix the canopy (R) on the mounting bracket (K) with the Screw (N).


Note: Method of installation for cement-based ceilin

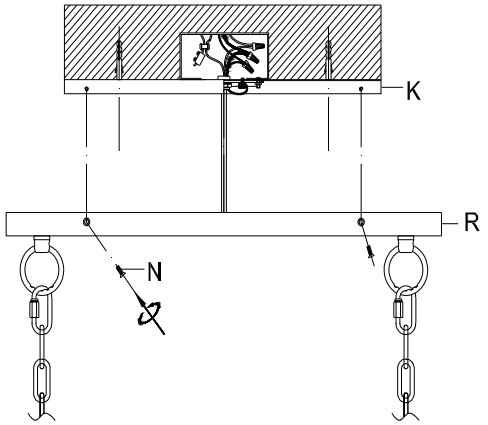



Step 5: Fix the canopy (R) on the mounting bracket (K) with the Screw (N).


PREPARATION

* Before beginning assembly of product, make sure all parts are present. Compare parts with package contents list and hardware contents list.
* If any part is missing or damaged, do not attempt to assemble the product.
* Estimated Assembly Time: 20 minutes.
* Tools Required for Assembly (not included): Screwdriver, Junction box
* If you are having difficulty, our friendly Customer Care team is always here to help. Please email **customersupport@safavieh.com**

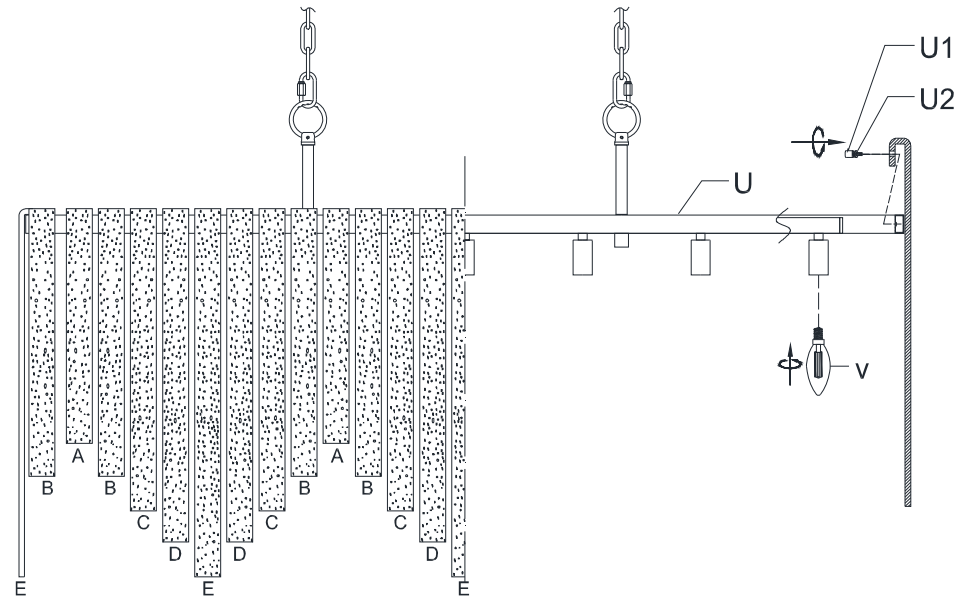

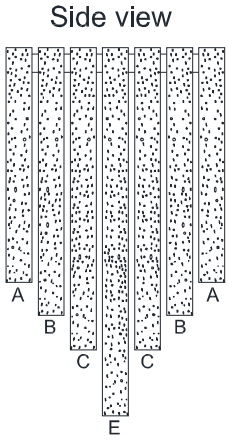

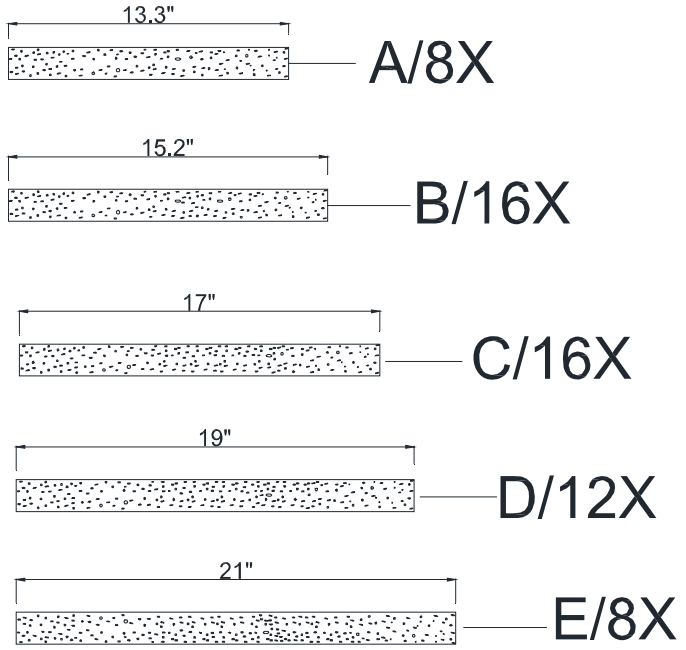

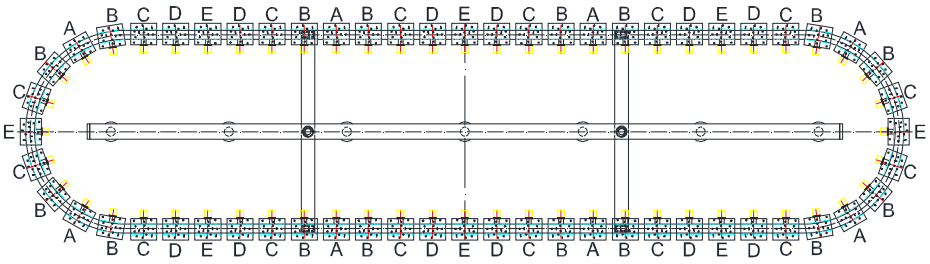

Step 6: Install the light bulb (V) to the socket.Take off the parts(U1) from Fixture body(U),Pass through Glass strip (A), (B) , (C), (D), (E) and fix to fixture body. While locking the glass please have glass be vertical and don't lock too tight to avoid the glass be slant.