WARNING

* WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN **
* Switch off the main electrical supply from the main fuse box / circuit.Breaker before installation.
* Inspect item carefully before attempting to install.
* If there is any damages or obvious defects, do not install.
* Item may not be returned once it has been installed.




CARE AND MAINTENANCE

* To clean the outside of the fixture, use a dry or slightly dampened clean cloth (use clean water, never a solvent) to wipe the surface of the fixture.
* To clean the inside of the fixture, first disconnect power to the fixture by turning off the circuit breaker or by removing the fuse at the fuse box. Next, use a dry or slightly dampened clean cloth (use clean water, never a solvent) to wipe the interior surface of the fixture.
* Do not use any cleaners with chemical, solvents or harsh abrasives. Use only a dry soft cloth to dust or wipe carefully.

NOTICE & IMPORTANT SAFETY INSTRUCTIONS


* Please make sure that you have all parts indicated before you begin assembly of this item.
* This item should be assembled on a soft surface to prevent scratching the finish during assembly.
* To reduce the risk of fire, electrical shock or injury to persons or property, please follow the guideline below for safe use and installation.
* The external flexible cable or cord of this lamp cannot be replaced,If the cord is damaged, the lamp shall be destroyed.

Part List and Hardware List

PIECE	DESCRIPTION	PICTURE	QUANTITY	PIECE	DESCRIPTION	PICTURE	QUANTITY
A	wire connector		3X	I	long round tube		4X
B	mounting bracket		1X	J	short round tube		4X
C	tapping screw		4X	K	long round rod		6X
D	Wall plug		4X	L	medium round rod		16X
E	mounting screw		2X	M	small round rod		4X
F	canopy		1X	N	lamp body		1X
G	screwed ball		2X	O	Metal joint		2X
H	connectors		4X	P	Nut /spacer		2X


SAFAVIEH COUTURE

Model#:CTL1043A
Product Dimensions:50"Lx15.5"Wx25.5-49.5"H

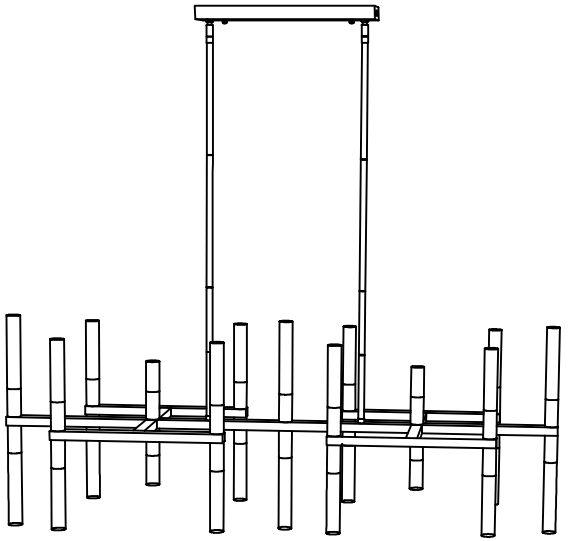


PREPARATION

* Before beginning assembly of product, make sure all parts are present. Compare parts with package contents list and hardware contents list.
* If any part is missing or damaged, do not attempt to assemble the product.
* Consult a qualified electrician to ensure correct branch circuit conductor.
* Estimated Assembly Time: 20 minutes.
* If you are having difficulty, our friendly Customer Care team is always here to help. Please email **customersupport@safavieh.com**

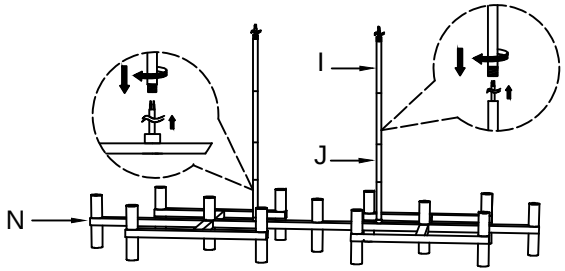


Step 1:Take out the lamp from the box, find the lamp body (N) and long round tube (I), short round tube(J), according to the requirements of the installation site to select a good tube.
Step 2:Use the main line on the lamp body (N)to pass through the tube, then tighten the tube in turn.

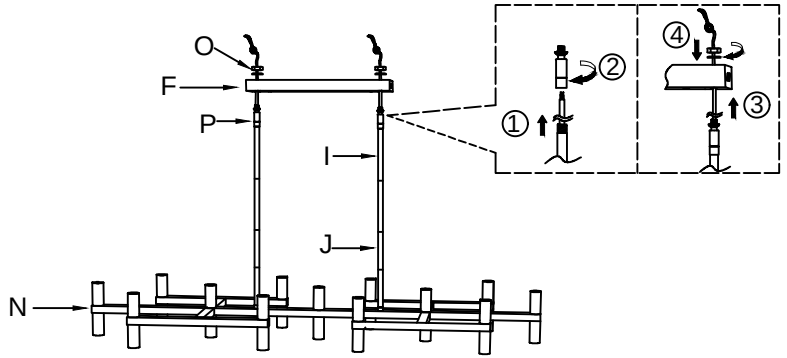

Step 3: 1. Pass the power cord through the (P) metal joint, and then tighten it with the (P) metal joint and the (I) long round pipe.
2. Run the power cord through the (F) canopy and tie a pull proof knot in the power cord.
3. Tighten (P) metal joint with (O) nut and gasket. as shown in the figure.


①

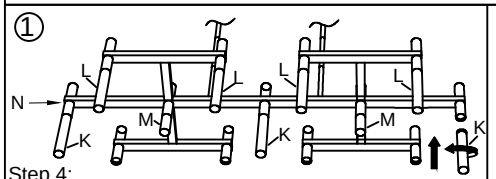

Step 4:


1.Place the lamp body(N) side on a suitable horizontal surface for installation , and install long round rod(K) ,medium round rod(L), and small round rod(M) onto lamp body(N), as shown in the figure.

②

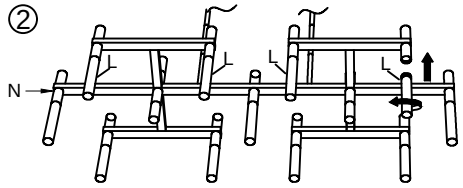


2.Flip N to the other side, and then install L onto N, as shown in the figure.

③

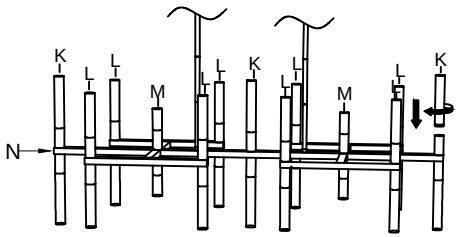

3.Place lamp body(N) flat on a horizontal surface, and then install long round rod(K), medium round rod(L), and small round rod(M) onto lamp body(N),as shown in the figure.


Users should pay attention to protecting the lamp body during installation.

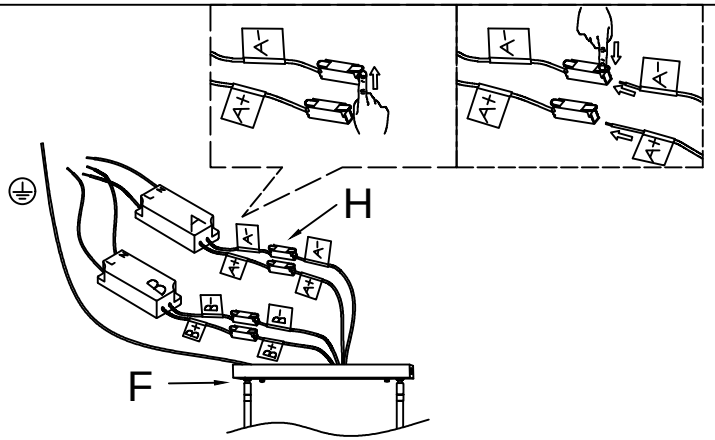


Step 5: In canopy (F), the main line and the transformer according to the corresponding letters of the label in turn with connectors (H) connection.


PREPARATION

* Before beginning assembly of product, make sure all parts are present. Compare parts with package contents list and hardware contents list.
* If any part is missing or damaged, do not attempt to assemble the product.
* Consult a qualified electrician to ensure correct branch circuit conductor.
* Estimated Assembly Time: 20 minutes.
* If you are having difficulty, our friendly Customer Care team is always here to help. Please email **customersupport@safavieh.com**

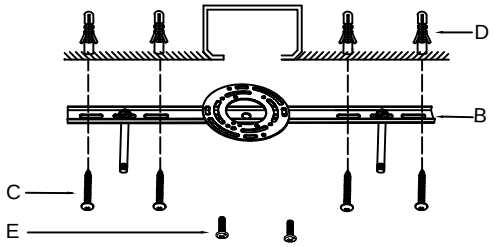


Step 6: Punch the hole and install the Wall plug (D) to the ceiling.
Fix the mounting bracket (B) to the outlet box with tapping screw (C) and mounting screw (E).






Step 7: Wire connection
Connect fixture neutral wire (ribbed) to the outlet box neutral wire (usually white) using a wire nut.
Connect fixture hot wire (smooth with markings) to the outlet box hot wire (usually black) using a wire nut.
CAUTION: Do not reverse the hot and neutral connections.

Grounding Instructions:
Wrap ground wire from outlet box around green ground screw on mounting bracket, no less than 2" from wire end. Tighten ground screw. If fixture is supplied with a ground wire, connect to outlet ground wire with a wire connector.

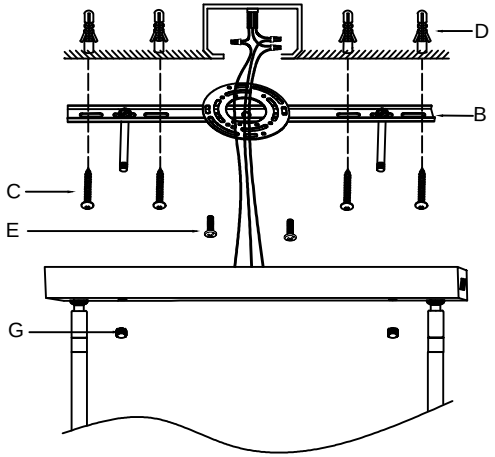

Step 8: Fix the canopy(F) to bracket(B) using screwed ball (G).

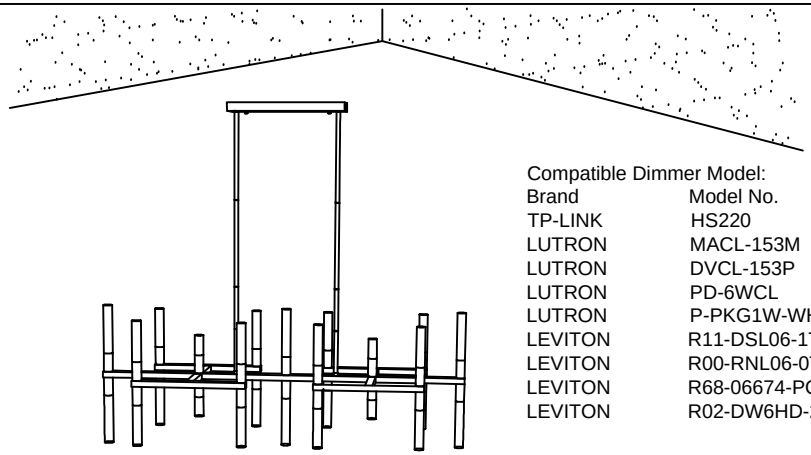

Compatible Dimmer Model:

Brand	Model No.
TP-LINK	HS220
LUTRON	MACL-153M
LUTRON	DVCL-153P
LUTRON	PD-6WCL
LUTRON	P-PKG1W-WH-R
LEVITON	R11-DSL06-1TW
LEVITON	R00-RNL06-0TW
LEVITON	R68-06674-POT
LEVITON	R02-DW6HD-2RW

Step 9: Turn on the power switch and check whether the light source is normal. Complete installation.