


SAFAVIEH

L I G H T I N G

Assembly Instruction

CAUTION: Read instruction carefully and turn electricity off at main circuit breaker panel before beginning installation.

ITEM #:CHA4004A

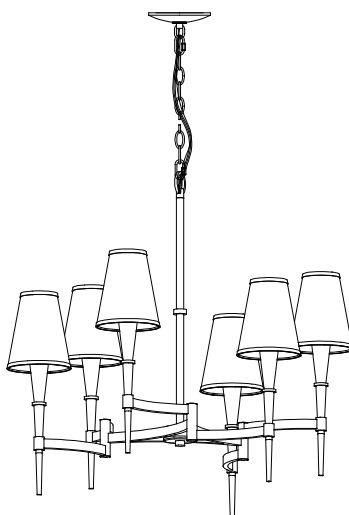

Care and Cleaning

To clean the outside of the fixture, use a dry or slightly dampened clean cloth (use clean water, never a solvent) to wipe the surface of the fixture.

To clean the inside of the fixture, first disconnect power to the fixture by turning off the circuit breaker or by removing the fuse at the fuse box. Next, use a dry or slightly dampened clean cloth (use clean water, never a solvent) to wipe the interior surface of the fixture.

Do not use any cleaners with chemical, solvents or harsh abrasives. Use Only a dry soft cloth to dust or wipe carefully.

Estimated Assembly Time: 30 minutes

Part List and Hardware List


PIECE	DESCRIPTION	PICTURE	QUANTITY	PIECE	DESCRIPTION	PICTURE	QUANTITY
A	Mounting bar		1X	G	Fabric shade		6X
A1	Mounting screw		2X	H	Bulbs		6X
B	Canopy		1X	I	Socket cover		6X
C	Lock		1X	J	Light fixture		1X
D	Out ring		1X	K	Decoration strip		6X
E	Chain		1X	O	Wire nut		3X
F	Suspender band		1X				

Installation

Step 1


- 1. Fix the suspender band(F)to the light fixture(J),
- 2. Attach the decoration strip(K)to the light fixture(J),
- 3. Fix the candle sleeve(I)to the socket(L),
- 4. Place the bulbs(H)to the socket(L),
- 5. Fix the fabric shade(G)to the bulbs(H).

***NOTE:PLEASE USE ON/OFF TYPE"B" BULB
MAX 40-WATT OR CFL BULB MAX 13-WATT
OR LED BULB MAX 9-WATT
THERE ARE 6PCS LED 4-WATT BULBS IN THE BOX**

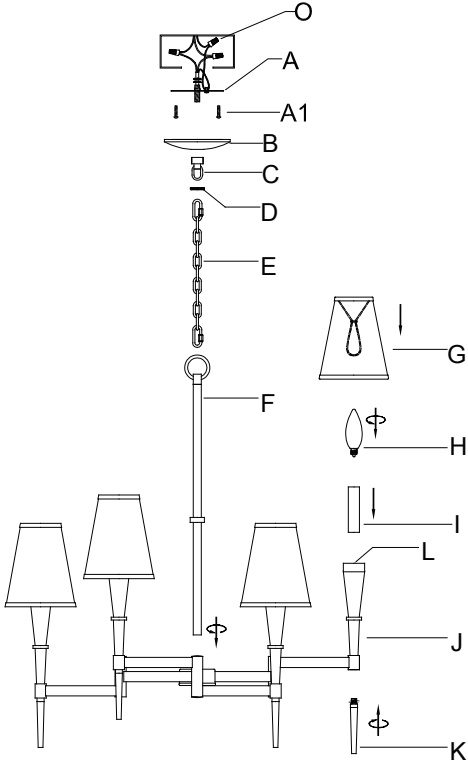


Step 2 Wire Connetion

Connect,Hot,Black or Red outlet Supply Wire to:	Connect,Neutral,White Outlet Supply Wire to:
Black	White
* Parallel Cord(round & smooth)	* Parallel Cord(square& ridged)
Clear,Brown,Gold or Black without Tracer(colored stripes)	Clear,Brown,Gold or Black without Tracer(colored stripes)
Insulated Wire(not green) with copper metal conductor	Insulated Wire(not green) with Silver metal conductor



***Note:** When parallel wire(SPTI & SPT II) is used.The neutral wire is square shaped and ridged and the hot wire will be round in shape and smooth.(See illustration on left.)



Step 3

Grounding Instructions:

- a) For installation in the United States: Wrap ground wire from outlet box around green ground screw on mounting bracket, no less than 2" from wire end. Tighten ground screw. If fixture is supplied with a ground wire, connect to outlet ground wire with a wire connector.
- b) For installation in Canada: If fixture is supplied with ground wire, wrap ground wire around green grounding screw on mounting bracket. Tighten ground screw.

Step 4

Installing the mounting bar(A) with mounting screw(A1), and secure canopy(B) with the lock(C) and tighten with out ring(D)

Step 5

Installing whole body to the lock(C)

Step 6

Consult a qualified electrician to ensure correct branch circuit conductor

ENJOY YOUR LAMP

