WARNING

* Switch off the main electrical supply from the main fuse box / circuit breaker before installation.
* Inspect item carefully before attempting to install.
* If there is any damages or obvious defects, do not install.
* Item may not be returned once it has been installed.





CARE AND MAINTENANCE

* To clean the outside of the fixture, use a dry or slightly dampened clean cloth (use clean water, never a solvent) to wipe the surface of the fixture.
* To clean the inside of the fixture, first disconnect power to the fixture by turning off the circuit breaker or by removing the fuse at the fuse box. Next, use a dry or slightly dampened clean cloth (use clean water, never a solvent) to wipe the interior surface of the fixture.
* Do not use any cleaners with chemical, solvents or harsh abrasives. Use only a dry soft cloth to dust or wipe carefully.

NOTICE& IMPORTANT SAFETY INSTRUCTIONS


** WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN **
* Please make sure that you have all parts indicated before you begin assembly of this item
* This item should be assembled on a soft surface to prevent scratching the finish during assembly
* To reduce the risk of fire, electrical shock or injury to persons or property, please follow the guideline below for safe use and installation
*The external flexible cable or cord of this lamp cannot be replaced
If the cord is damaged, the lamp shall be destroyed

Part List and Hardware List

PIECE	DESCRIPTION	PICTURE	QUANTITY	PIECE	DESCRIPTION	PICTURE	QUANTITY
A	mounting screw		2X	F	lamp body		1X
B	mounting plate		1X	G	screwed ball		2X
C	ground screw		1X	H	Shade		1X
D	machine screw		2X	I	Socket ring		1X
E	wire connector		3X	J	Bulb		1X

SAFAVIEH LIGHTING


Model#:SCN4070
Product Dimensions: 8"W x 12.25"Lx10.5"H

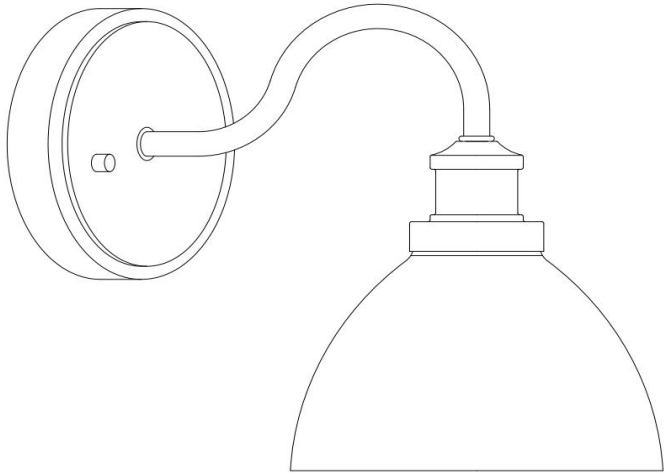

PREPARATION

* Before beginning assembly of product, make sure all parts are present. Compare parts with package contents list and hardware contents list.
* If any part is missing or damaged, do not attempt to assemble the product.
* Estimated Assembly Time: 15 minutes.
* Tools Required for Assembly (not included): Screwdriver, Junction box
* If you are having difficulty, our friendly Customer Care team is always here to help. Please email **customersupport@safavieh.com**

NOTE: PLEASE USE TYPE "A" BULB MAX 40-WATT OR LED BULB MAX 9-WATT, THERE IS LED 9-WATT BULB IN THE BOX

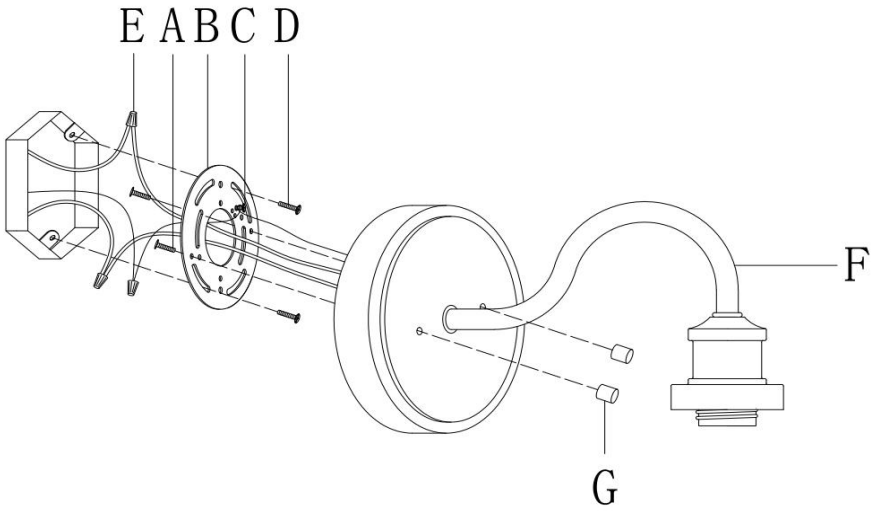


Step 1: Thread mounting screws (A) into the mattch holes of the mounting plate(B),from outlet box.then fix the mounting plate(B) to the outlet box with machine screw(D).




Step 2: Wire connection.
Connect fixture neutral wire (ribbed) to the outlet box neutral wire (usually white) using a wire nut. Connect fixture hot wire (smooth with markings) to the outlet box hot wire (usually black) using a wire nut. CAUTION: Do not reverse the hot and neutral connections. Grounding Instructions: Wrap ground wire from outlet box around ground screw on mounting plate, no less than 2" from wire end. Tighten ground screw. If fixture is supplied with a ground wire, connect to outlet ground wire with a wire nut.

PREPARATION

* Before beginning assembly of product, make sure all parts are present. Compare parts with package contents list and hardware contents list.
* If any part is missing or damaged, do not attempt to assemble the product.
* Estimated Assembly Time: 15 minutes.
* Tools Required for Assembly (not included): Screwdriver, Junction box.
* If you are having difficulty, our friendly Customer Care team is always here to help. Please email **customersupport@safavieh.com**

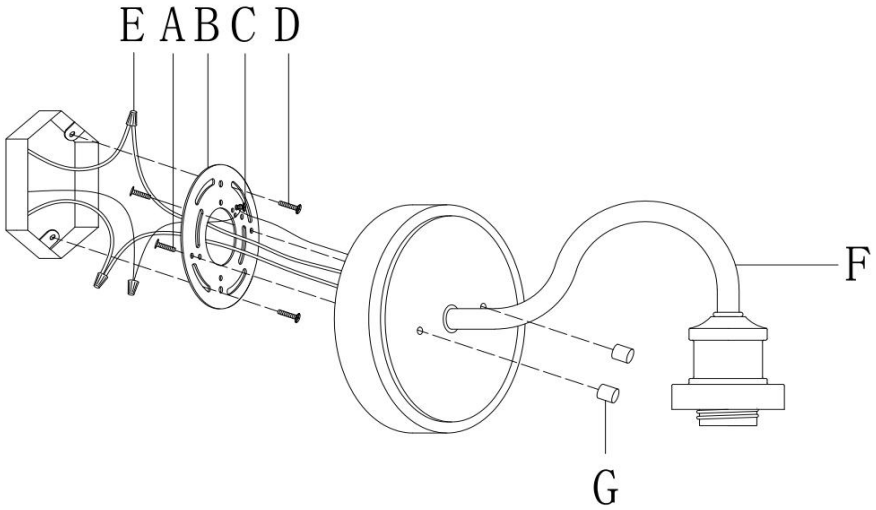

Step 3: Attach the lamp body (F) to the Mounting plate (B) and fix it by turning the screwed ball (G).

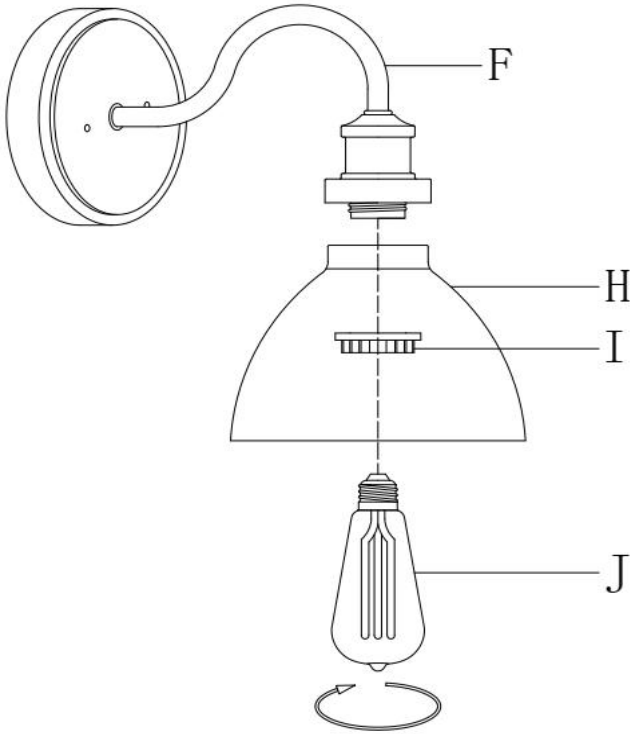

Step 4: Place the shade (H) over the socket.the seure with the socket ring (I).Insert the bulbs (J) into the Sockets.