











CARE AND MAINTENANCE

Always use felt pads under all articles to prevent discoloration or softening of the lacquer. Plastic and rubber bases on items can discolor wood. Wipe up spills immediately and avoid common hazards such as hot dishes, harsh solvents and abrasives. Cleaning should be done with a soft lint free cotton cloth dampened with water or furniture polish. On highly used surfaces we recommend applying a quality paste wax which should be used on a regular basis to provide additional protection from scratches and spills. How often you apply the wax depends on how much wear the furniture receives.

NOTICE

- * Please make sure that you have all parts indicated before you begin assembly of this item
- * This item should be assembled on a soft surface to prevent scratching the finish during assembly
- * This item may require periodic tightening

Part List and Hardware List


PIECE	DESCRIPTION	PICTURE	QUANTITY
A	Top-L		1X
B	Leg-L		2X
C	Block-L		1X
D	Top-S		1X
E	Leg-S		2X
F	Block-S		1X
H1	Flat Washer 6mm		10X
H2	Socket Screw 6x0.5x30mm		10X
H3	Screw		4X
H4	Allen key		1X



Item ID# FOX4203

Product Dimensions:L:17-3/5"W x 17-3/5"D x 23-3/5" H
S:14-1/4"W x 14-1/4"D x 21-3/5"H

Weight Capacity:30LBS

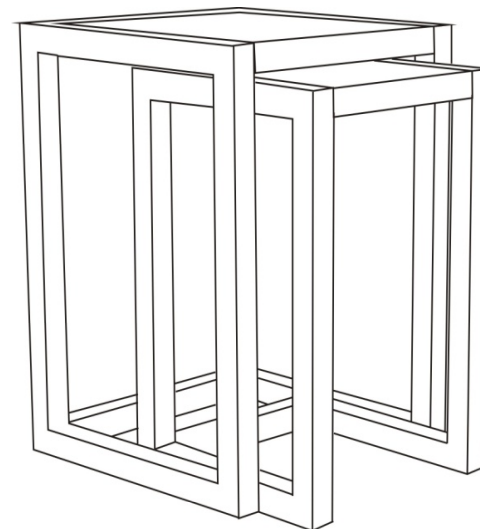

Warning:Don not stand on table
Warning:Don not over torque screws


PREPARATION

Before beginning assembly of product, make sure all parts are present. Compare parts with package contents list and hardware contents list.


If any part is missing or damaged, do not attempt to assemble the product.

Estimated Assembly Time: 20 minutes.


Tools Required for Assembly (included): Allen Key

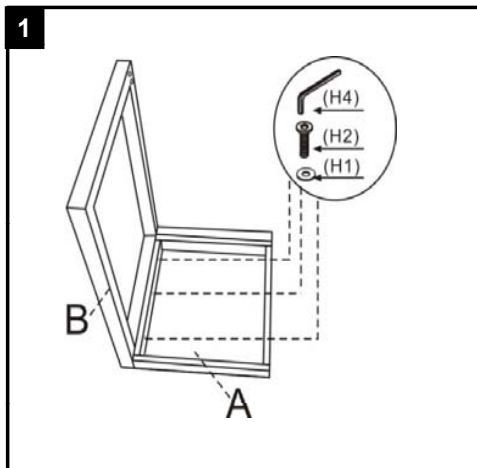


Step 1
Attach leg(B) to Top(A),using Flat washer and Socket Screw(H1&H2),Tighten with allen key(H4)

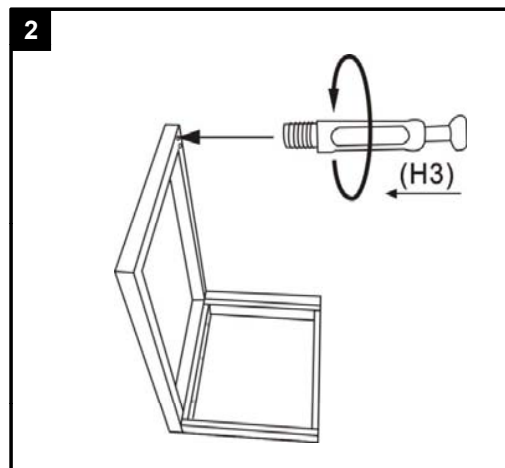


Step 2
Attach the screw (H3) to the leg(B),tighten with philips driver

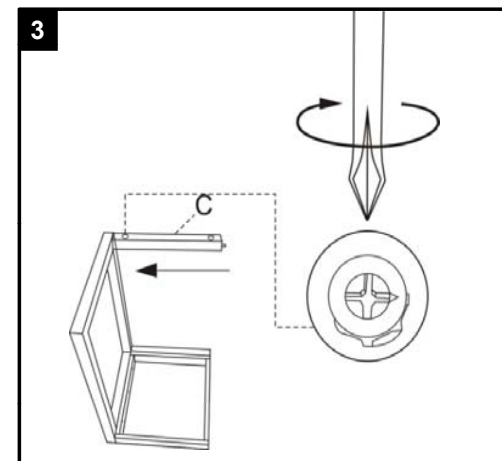


Step 3
Attach the block(C) to leg(B)

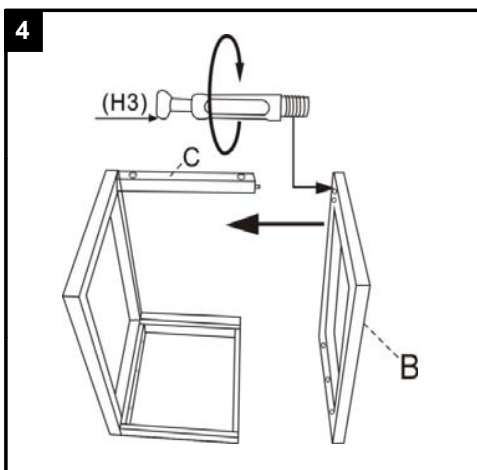


Step 4
Assemble the other leg (B) as previously

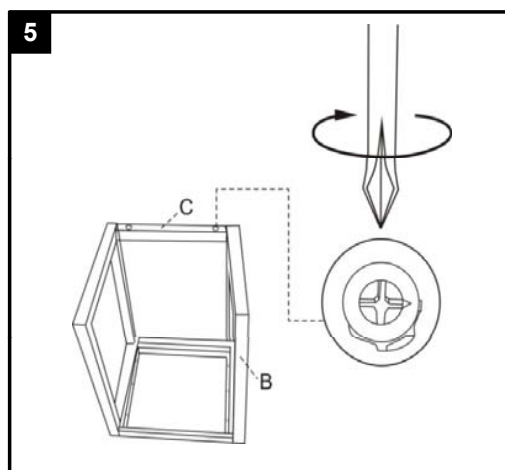


Step 5
Tighten the block(C) to leg(B) with philips driver

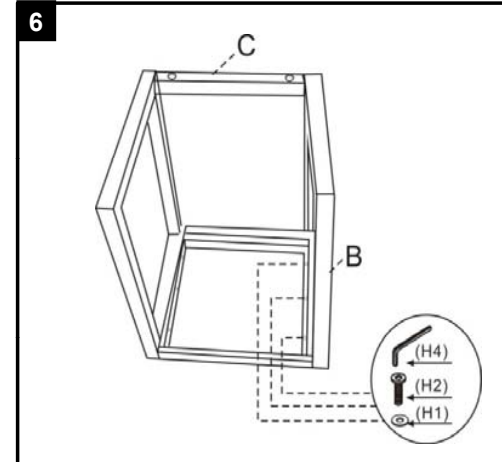


Step 6
Tighten the leg (B) to the top (A) using as Flat washer and Socket Screw(H1&H2),Tighten with allen key(H4)

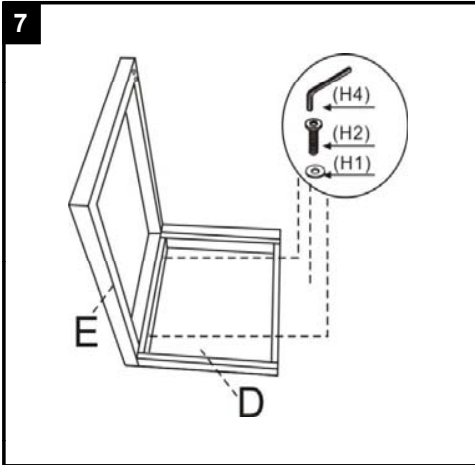


Step 7
Attach leg(E) to Top(D), using **Flat washer and Socket Screw(H1&H2)**, Tighten with allen key(H4)

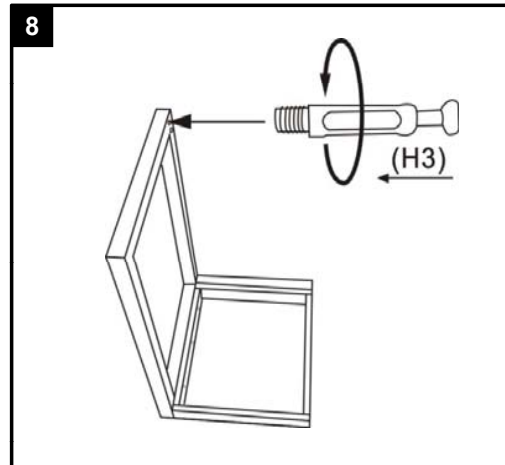


Step 8
Attach the screw (H3) to the leg(E), tighten with philips driver

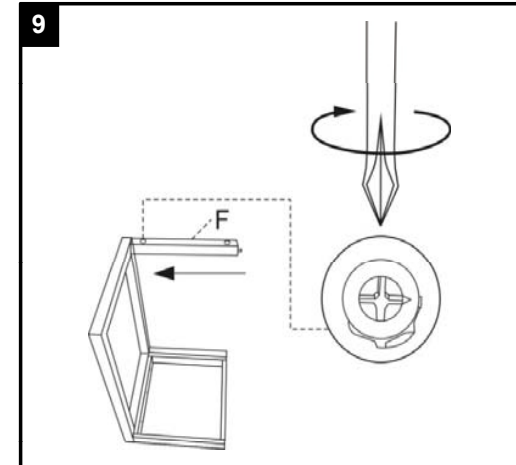


Step 9
Attach the block(F) to leg(E)

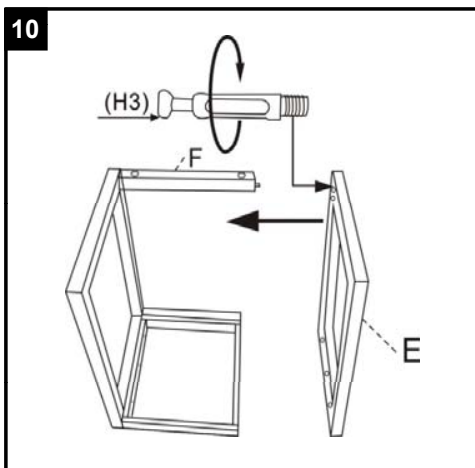

Step 10
Assemble the other leg (E) as previously

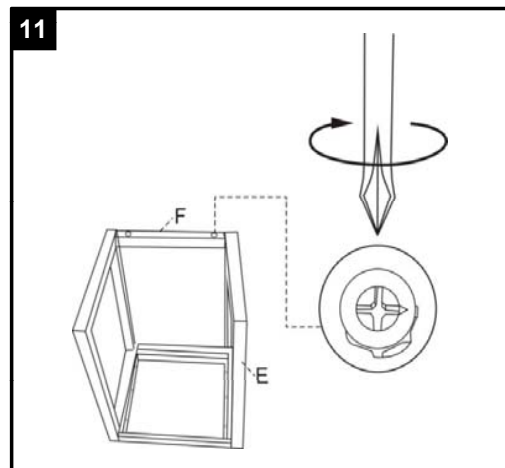

Step 11
Tighten the block(F) to leg(E) with philips driver

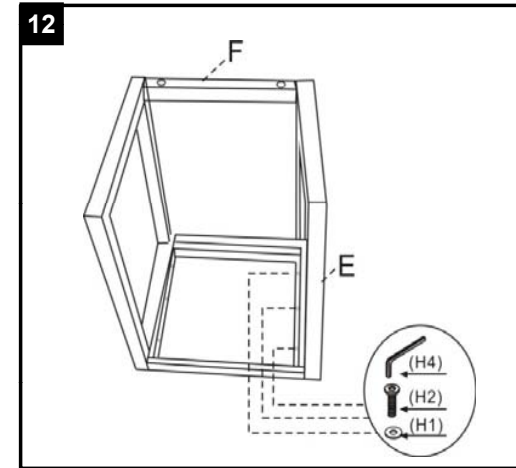

Step 12
Tighten the leg (E) to the top (D) using as **Flat washer and Socket Screw(H1&H2)**, Tighten with allen key(H4)