CARE AND MAINTENCE

Wipe clean with a soft, dry cloth. The seat board can be cleaned with a mild cleaner. Test the cleaning method on a hidden area before using them over the entire area.

NOTICE

- * Please make sure that you have all parts indicated before you begin assembly of this item.
- * This item should be assembled on a soft surface to prevent scratching the finished product during assembly.
- * This item may require periodic tightening.
- * Do not tighten bolts until completely assembled.


Part List and Hardware List

Piece	Description	Picture	Quantity
А	CABINET		1 X
В	SHELF	\Diamond	1 X
С	LEG		4 X
HW1	HEX SOCKET BOLT 1/4"-20x 2"		8 X
HW2	ALLEN KEY 4mm		1 X
HW3	BRACKET 25x25mm	9	4 X
HW4	WOODEN SCREW M4x15mm		8 X
HW5	Anti-Tip Hardware	& °	1 X



Model# FOX6275

Product Dimensions: 24"W*18"D*26"H.



Weight Capacity: 25 lbs on top of the product


Warning: Do not stand on the product Warning: Do not over torque bolts

PREPARATION


Before beginning assembly of product, make sure all parts are present. Compare parts with package contents list and hardware contents list. If any part is missing or damaged, do not attempt to assemble the product.

Estimated Assembly Time:15 minutes.

Tools Required for Assembly (included):Allen key.

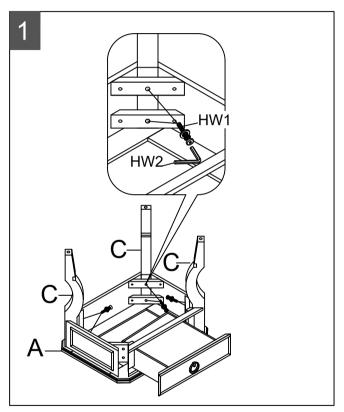


Step 1: Attach 3 legs (C) first, screw with cabinet (A) by using Allen key (HW2) to lock with 6*bolts (HW1)

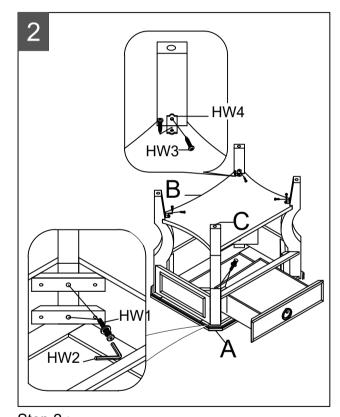

Step 2:
Attach the shelf (B) with the assembled 3 legs (C), then attach the last one leg (C) to the cabinet (A), using Allen key (HW2) to lock with 2*bolts (HW1).

Screwing 4*brackets (HW3) by 8*wooden screws (HW4).

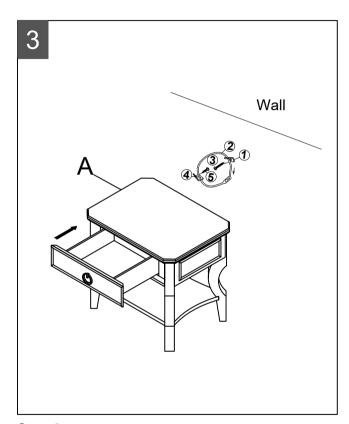

Step 3:
Push the drawer close, Straighten up the assembled server. Following the installation instructions of anti-tipping to fix the server in the wall by 1 strap. assembly is completed.