CARE AND MAINTENANCE

Wipe clean with a soft, dry cloth. Test the cleaning method on a hidden area before using them over the entire area.

NOTICE

- * Please make sure that you have all parts indicated before you begin assembly of this item.
- * This item should be assembled on a soft surface to prevent scratching the finished product during assembly.
- * This item may require periodic tightening.
- * Do not tighten bolts until completely assembled.


Part List and Hardware List

PIECE	DESCRIPTION	PICTURE	QUANTITY
А	Upper Back Frame		1x
В	Bottom Back Frame		1x
С	Shelf Frame		4x
D	Support Bar		2x
E	Bottom Board		1x
F	Glass Shelf		4x
H1	Allen Bolt	@ 1/4"x1-1/2"	16x
H2	Allen Bolt	@)))))) 1/4"x5/8"	12x
H3	Suction Cup	© Ø19mm	16x
H4	Allen Key	M4	1x
H5	Anti-Tip Hardware		2x



Model# FOX6299

Product Dimensions: 34"W*12"Dx76"H

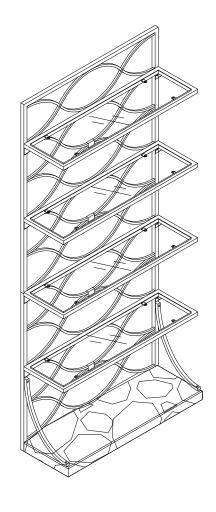


PREPARATION

Before beginning assembly of product, make sure all parts are present. Compare parts with package contents list and hardware contents list. If any part is missing or damaged, do not attempt to assemble the product.

Estimated Assembly Time: 30 minutes.

Tools Required for Assembly (included): Allen Key

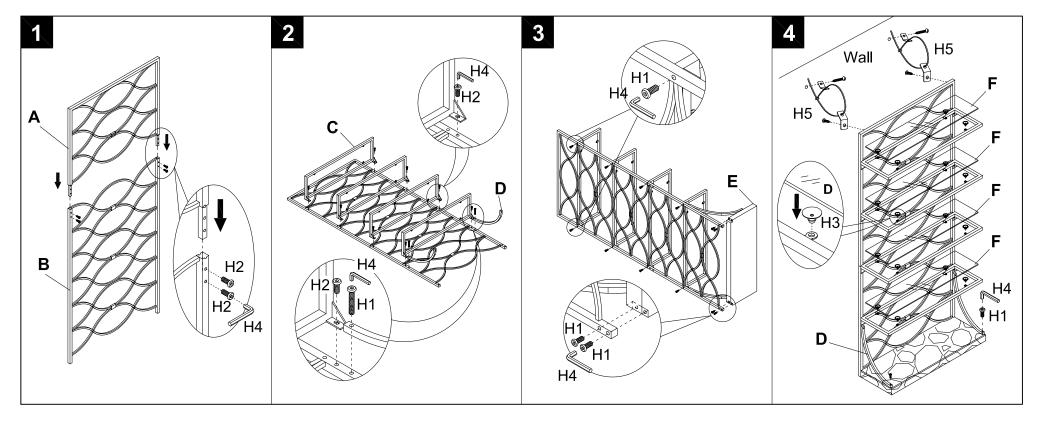

Step 1

Attach upper back frame (A) to the bottom back frame (B), Use Allen Key (H4) to lock 4*Allen bolts (H2).

Step 2

Lay the assembled back frame flat then attach 4*shelf frames (C), Use Allen Key (H4) to lock 8*Allen bolts (H2).

And attach 2*support bars (D) to the bottom back frame, Use Allen Key (H4) to lock 2*Allen bolts (H1). as picture.

Step 3

Put the assembled rack frame in side lay, lock 8*Allen bolts (H1) by Allen Key (H4) from back side. Attach bottom board (E) on bottom frame, Use Allen Key (H4) to lock 4*Allen bolts (H1). as picture.

Step 4

Straighten up the assembled rack, place 16*suction cups (H3) on 4 metal shelves frame in position, and place 4* Glass shelves (F) on 4 shelves separately. Following the Installation Instructions of anti-tipping to fix the rack with wall by 2 straps, Assembly is completed.