


SAFAVIEH

LIGHTING

Assembly Instruction

CAUTION: Read instruction carefully and turn electricity off at main circuit breaker panel before beginning installation.

ITEM#: LIT4204A

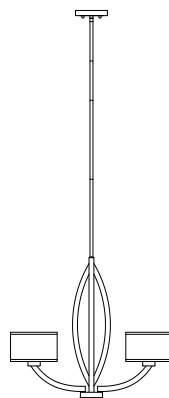

Care and Cleaning

To clean the outside of the fixture, use a dry or slightly dampened clean cloth (use clean water, never a solvent) to wipe the surface of the fixture.

To clear the inside of the fixture, first disconnect power to the fixture by turning off the circuit breaker or by removing the fuse at the fuse box. Next, use a dry or slightly dampened clean cloth (use clean water, never a solvent) to wipe the interior surface of the fixture.

Do not use any cleaners with chemical, solvents or harsh abrasives. Use Only a dry soft cloth to dust or wipe carefully.

Estimated Assembly Time: 30 minutes


Part List and Hardware List

| PIECE | DESCRIPTION | PICTURE | QUANTITY | PIECE | DESCRIPTION | PICTURE | QUANTITY | PIECE | DESCRIPTION | PICTURE | QUANTITY |
|-------|----------------|---------|----------|-------|---------------|---------|----------|-------|--------------|---------|-------------------|
| A | Mounting Plate | | 1X | F | Cover | | 1X | K | Tube | | 12"--2X 6"--2X |
| B | Canopy | | 1X | G | Cross Frame | | 1X | L | Wire Nut | | 3X |
| C | Canopy Nut | | 2X | H | Threaded Tube | | 1X | M | Bulb | | 5X |
| D | Mounting Screw | | 2X | I | Socket Ring | | 5X | N | Fabric Shade | | 5X |
| E | Threaded Nut | | 1X | J | Lamp Body | | 1X | | | | |

Installation


Step 1

Separate the Mounting Plate(A) from the Canopy(B) by removing the Canopy Nuts(C) anti-clockwise.

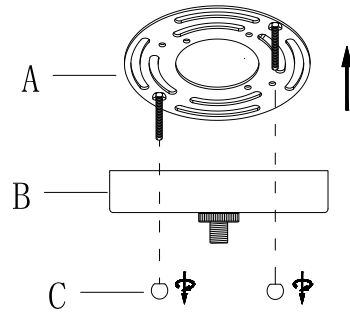

Step 2


Attach the Mounting Plate (A) onto the junction box and fix it by inserting the Mounting Screws(D) clockwise till tight.

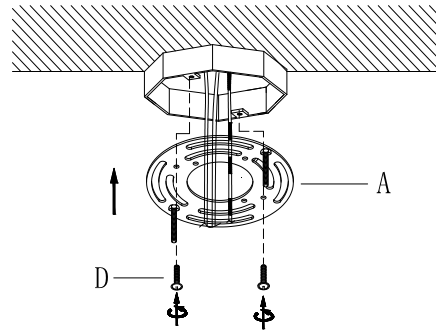

Step 3

Insert the fixture wires through the Threaded Tube(H). Rotate the Threaded Tube(H) into the nipple of the Lamp body(J) clockwise till tight.


Place the Cross Frame(G) onto the Threaded Tube(H). Insert the wires through Cover(F) and Threaded Nut(E). Fix the Cross Frame(G) in place by turning the Threaded Nut(E) clockwise till tight.

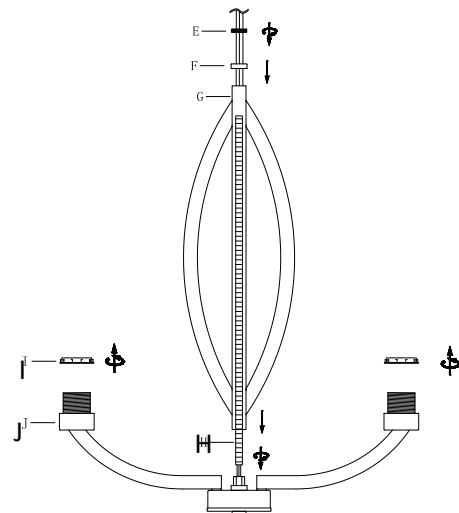

Separate the Socket Ring(I) from the Lamp Body(J).


Step 4

Insert the fixture wire through the tubes(K) to get desired length and Canopy(B). Rotate each part clockwise till tight.

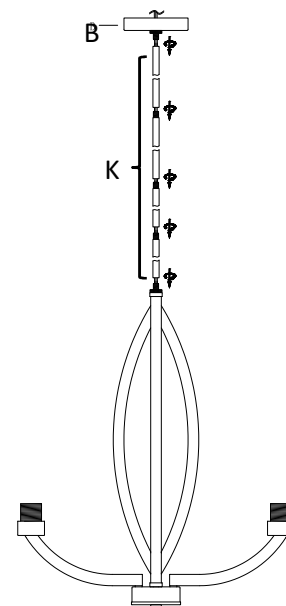

Step 5 Wire connection

| | |
|---|--|
| Connect,Hot,Black or Red outlet Supply Wire to: | Connect,Neutral,White Outlet Supply Wire to: |
| Black | White |
| *Parallel Cord(round&smooth) | *Parallel Cord(square&ridged) |
| Clear,Brown,Gold or Black without Tracer(colored stripes) | Clear,Brwn,Gold or Black without Tracer(colored stripes) |
| Insulated Wire(not green)with copper metal conductor | Insulated Wire(not green)with Silver metal conductor |




*Note: When parallel wire(SPTI&SPTII)is used. The neutral wire is square shaped and ridged and the hot wire will be round in shape and smooth.(See illustration on left)

Grounding Instructions:

- a) For installation in the United States: Wrap ground wire from outlet box around green ground screw on mounting bracket, no less than 2" from wire end. Tighten ground screw. If fixture is supplied with a ground wire, connect to outlet ground wire with a wire connector.
- b) For installation in Canada: If fixture is supplied with ground wire, wrap ground wire around green grounding screw on mounting bracket. Tighten ground screw.

Step 6

Attach the Canopy(B) over the Mounting Plate (A) and fix it by turning the Canopy Nuts(C) clockwise till tight.

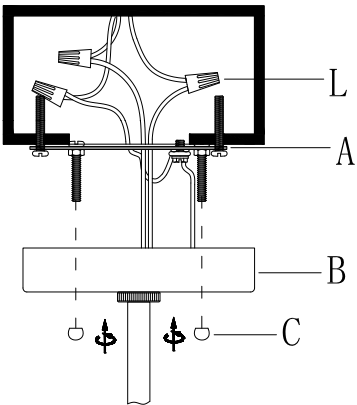


Step 7

Place the Fabric Shade(N) onto the socket and fix it by returning the Socket Ring(I) clockwise till tight.

Insert the bulb(M) into the socket until secure. Be sure to use light bulb(M) with wattage no greater than specified on this fixture. Always make sure that electrical current is turned off before changing bulbs.

PLEASE USE TYPE"A" BULB MAX 40-WATT OR CFL BULB MAX 13-WATT OR LED MAX 9-WATT THERE ARE 5* 4-WATT LED BULBS IN THE BOX

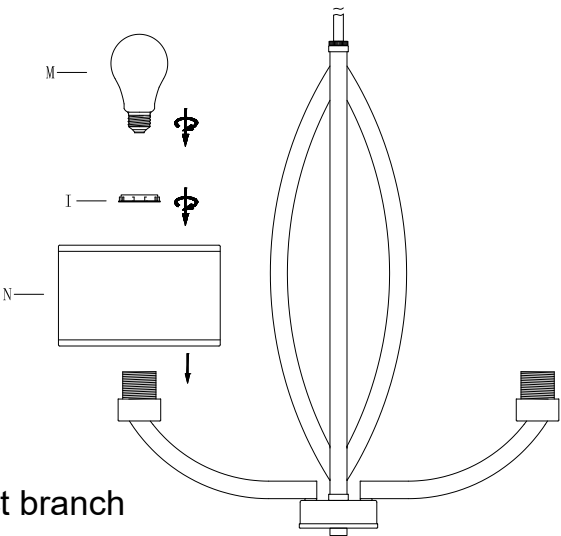

Step 8

Consult a qualified electrician to ensure correct branch circuit conductor

ENJOY YOUR LAMP