

WARNING

**** WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN ****

* Switch off the main electrical supply from the main fuse box / circuit breaker before installation.

* Inspect item carefully before attempting to install.

* If there is any damages or obvious defects, do not install.

* Item may not be returned once it has been installed.

CARE AND MAINTENANCE

* To clean the outside of the fixture, use a dry or slightly dampened clean cloth (use clean water, never a solvent) to wipe the surface of the fixture.

* To clean the inside of the fixture, first disconnect power to the fixture by turning off the circuit breaker or by removing the fuse at the fuse box. Next, use a dry or slightly dampened clean cloth (use clean water, never a solvent) to wipe the interior surface of the fixture.

* Do not use any cleaners with chemical, solvents or harsh abrasives. Use only a dry soft cloth to dust or wipe carefully.

NOTICE& IMPORTANT SAFETY INSTRUCTIONS

* Please make sure that you have all parts indicated before you begin assembly of this item

* This item should be assembled on a soft surface to prevent scratching the finish during assembly

* To reduce the risk of fire, electrical shock or injury to persons or property, please follow the guideline below for safe use and installation


*The external flexible cable or cord of this lamp cannot be replaced

If the cord is damaged, the lamp shall be destroyed









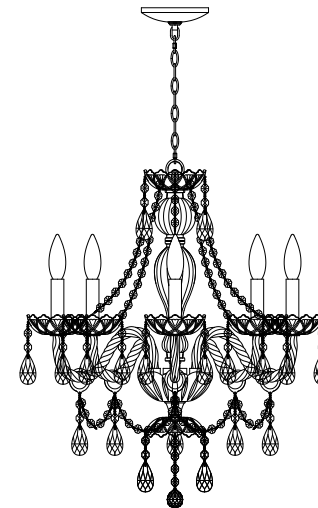




















SAFAVIEH
LIGHTING

Model#: LIT4418A

Product Dimensions: 22.5"L X 22.5"W X 27.5-99.5"H




Part List and Hardware List

PIECE	DESCRIPTION	PICTURE	QUANTITY	PIECE	DESCRIPTION	PICTURE	QUANTITY	PIECE	DESCRIPTION	PICTURE	QUANTITY	PIECE	DESCRIPTION	PICTURE	QUANTITY
A	Mounting bar		1X	G	Crystal string 11.5"		5X	M	Internal teeth Washer		6X	S	Glass bowl		1X
A1	Mounting screw		2X					M1	Flate Washer		2X				
B	Canopy		1X	H	Bulb		5X	N	Spring washer		5X	T	Trumpet cap		1X
								N1	Plastic washer		2X				
C	Lock		1X	I	Glass bowl		5X	O	Thick hex screw		5X	U	Glass bowl		1X
								O1	Thin hex screw		3X				
D	Out ring		1X	J	Socket cover		5X	P	Crystal string 9.8"		5X	V	Metal finial		1X
E	Chain		1X	K	Glass arm		5X	Q	Wire nut		5X	W	Dropper		1X
F	Dropper		29X	L	Acrylic ring		5X	R	Support wire cap		1X	X	Metal round plate		1X
												Y	Spanner		1X


PREPARATION

- * Before beginning assembly of product, make sure all parts are present. Compare parts with package contents list and hardware contents list.
- * If any part is missing or damaged, do not attempt to assemble the product.
- * Estimated Assembly Time: 20 minutes.
- * If you are having difficulty, our friendly Customer Care team is always here to help. Please email customersupport@safavieh.com



NOTE: PLEASE USE TYPE"B" BULB MAX 60-WATT OR CFL BULB MAX 13-WATT OR LED BULB MAX 9-WATT, THERE ARE 5*LED 4-WATT BULB IN THE BOX

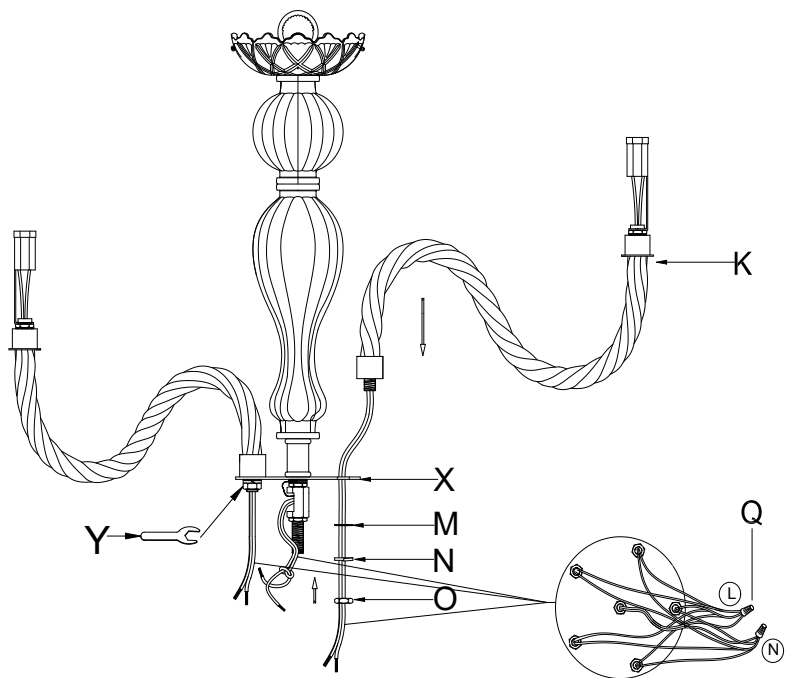

Step 1: Place the glass arm(K) to the metal round plate(X) and tighten with washer(M),spring washer(N) and thick hex screw(O), secure the thick hex screw (O) balance the 5 arms evenly with spanner (Y). Connect electrical wire by wire nut(Q), identify positive and neutral(See Step 3)

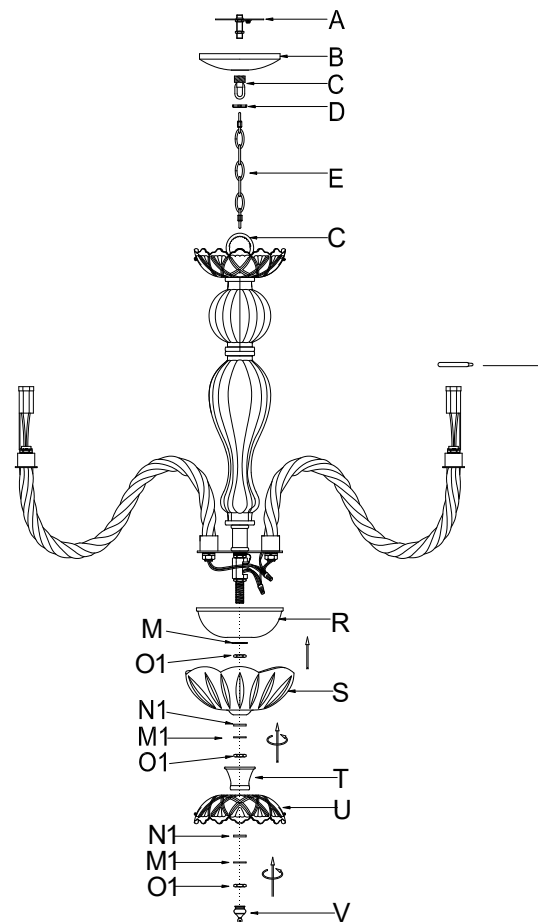

Step 2: Place the support wire cap(R), internal teeth washer(M),thin hex screw(O1), glass bowl(S),plastic washer(N1),flat washer(M1), thin hex screw(O1)and trumpet cap(T) ,glass bowl(U) to the nipple of the metal round plate(X) then tighten with plastic washer(N1),flat washer(M1),thick hex screw(O1) and metal finial(V).Place acrylic ring(L) to the glass arm(K) by cross the lampholder. Screw the chain(E) to the lock(C) of the lampholder

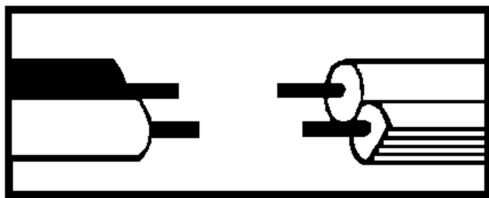


Step 3: Wire connection

Connect fixture neutral wire (ribbed) to the outlet box neutral wire (usually white) using a wire nut. Connect fixture hot wire (smooth with markings) to the outlet box hot wire (usually black) using a wire nut.


CAUTION: Do not reverse the hot and neutral connections

Grounding Instructions:

Wrap ground wire from outlet box around green ground screw(B) on mounting bracket, no less than 2" from wire end. Tighten ground screw. If fixture is supplied with a ground wire, connect to outlet ground wire with a wire connector.

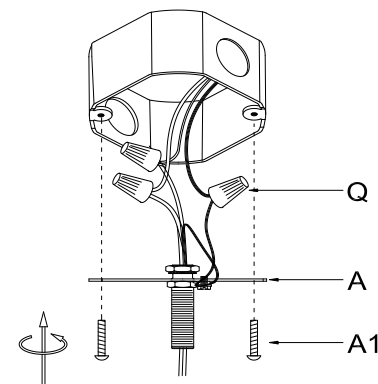


Step 4: Install the Mounting Plate(A) to the junction box with Mounting Screw (A1).

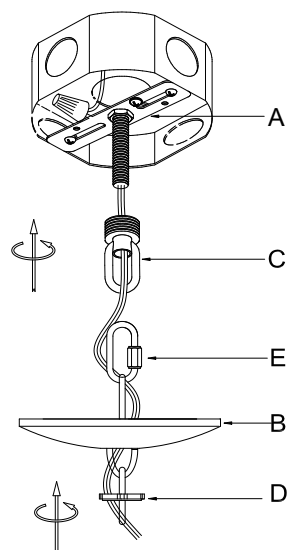

Step 5: Place Lock(C) to mounting bracket and then secure chain(E) to Lock(C).

Attach the Canopy(B) to the junction box and fix it by turning the Canopy Nut(D) clockwise.

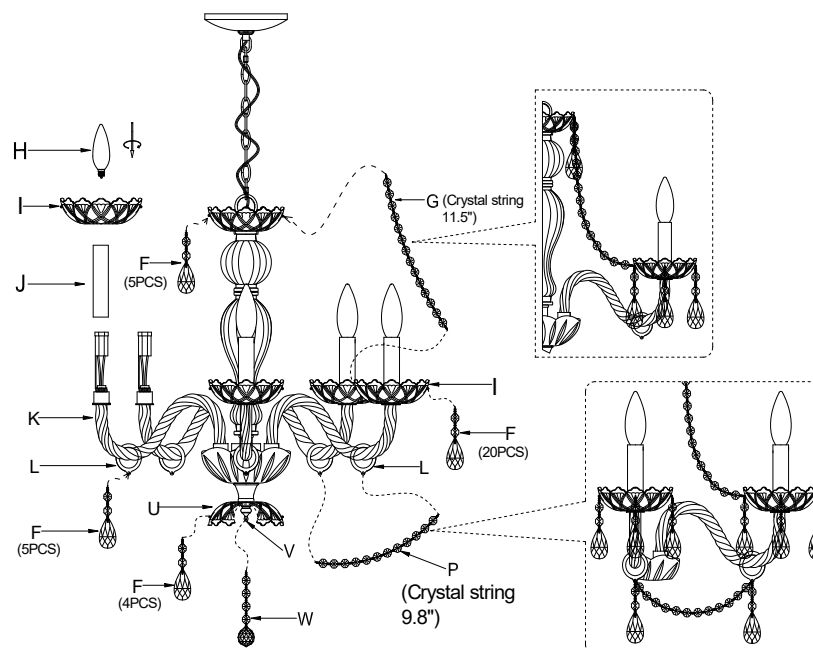

Step 6: Place socket cover(J),glass bowl(I) and bulb(H) to the lampholder.

Hang dropper(F) on the hole of acrylic ring(L),the glass bowl(I) of the lampholder, the top glass bowl and the bottom glass bowl(U)Hang crystal string 9.8"(P) to the acrylic ring(L) of each glass arm(K) Hang crystal string 11.5"(G) to the hole of top glass bowl and the hole of the glass bowl(I) Hang dropper(W) to the metal finial(V)