


# SAFAVIEH LIGHTING

## Assembly Instruction

**CAUTION:** Read instruction carefully and turn electricity off at main circuit breaker panel before beginning installation.

ITEM #:LIT4440A



### Care and Cleaning












To clean the outside of the fixture, use a dry or slightly dampened clean cloth (use clean water, never a solvent) to wipe the surface of the fixture.

To clean the inside of the fixture, first disconnect power to the fixture by turning off the circuit breaker or by removing the fuse at the fuse box. Next, use a dry or slightly dampened clean cloth (use clean water, never a solvent) to wipe the interior surface of the fixture.

Do not use any cleaners with chemical, solvents or harsh abrasives. Use Only a dry soft cloth to dust or wipe carefully.

Estimated Assembly Time: 30 minutes


### Part List and Hardware List

PIECE	DESCRIPTION	PICTURE	QUANTITY	PIECE	DESCRIPTION	PICTURE	QUANTITY
A	Mounting bar		1X	C	Screw Part		3X
A1	Mounting screw		2X	D	Bulb		6X
A2	Canopy screw		2X	E	Bulb Cover		6X
B	Hang Frame		1X	F	Body Frame		1X
				G	Plastic screw		1X
B1	Canopy		1X	H	Wire Nut		3X

# Installation


## Step 1

- Unpack all parts from cartons carefully
- Press lifter to adjust electrical wire to suitable length or twist plastic screw(G) if needing
- Screw the hang frame(B) to the body frame(F) and tighten by screw part ( C )
- Place bulb(D) to the socket and then bulb cover( E)

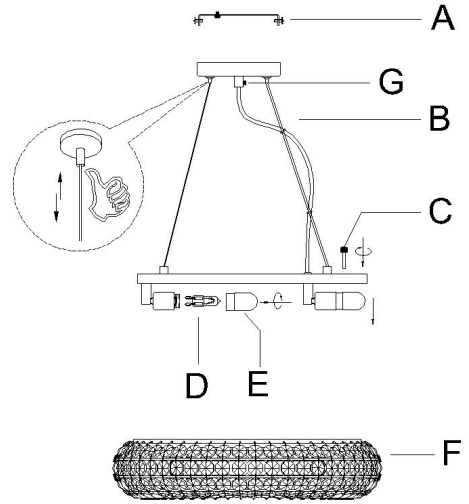


## Step 2 Wire Connection

Connect, Hot, Black or Red outlet Supply Wire to:	Connect, Neutral, White Outlet Supply Wire to:
Black	White
* Parallel Cord(round & smooth)	* Parallel Cord(square & ridged)
Clear, Brown, Gold or Black without Tracer(colored stripes)	Clear, Brown, Gold or Black without Tracer(colored stripes)
Insulated Wire(not green) with copper metal conductor	Insulated Wire(not green) with Silver metal conductor




\*Note: When parallel wire(SPT I & SPT II) is used. The neutral wire is square shaped and ridged and the hot wire will be round in shape and smooth. (See illustration on left.)




## Step 3

- Adjust the wire to suitable length before installing the mounting bar(A) with mounting screw(A1), and secure the canopy with canopy screw(A2) by screwdriver

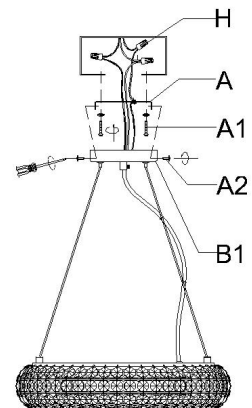

## Step 4

- Consult a qualified electrician to ensure correct branch circuit conductor



ENJOY YOUR LAMP