


# SAFAVIEH LIGHTING

## Assembly Instruction

**CAUTION:** Read instruction carefully and turn electricity off at main circuit breaker panel before beginning installation.

ITEM #:LIT4445A

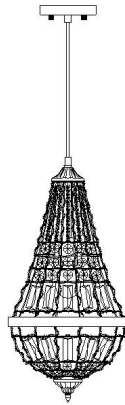

### Care and Cleaning













To clean the outside of the fixture, use a dry or slightly dampened clean cloth (use clean water, never a solvent) to wipe the surface of the fixture.

To clean the inside of the fixture, first disconnect power to the fixture by turning off the circuit breaker or by removing the fuse at the fuse box. Next, use a dry or slightly dampened clean cloth (use clean water, never a solvent) to wipe the interior surface of the fixture.

Do not use any cleaners with chemical, solvents or harsh abrasives. Use Only a dry soft cloth to dust or wipe carefully.

Estimated Assembly Time: 30 minutes

### Part List and Hardware List

PIECE	DESCRIPTION	PICTURE	QUANTITY	PIECE	DESCRIPTION	PICTURE	QUANTITY
A	Mounting bar		1X	D	Bottom Frame		1X
A1	Mounting screw		2X	D1	Screw		1X
B	Top Frame		1X	D2	Metal nipple		1X
B1	Screw nut		2X	D3	Metal cap		1X
B2	Canopy		1X	D4	Metal finial		1X
C	Bulb		1X	E	Wire Nut		3X

# Installation

## Step 1


Unpack all parts from cartons carefully

Place bulb(C) to the socket

Secure metal tube(D2)to the bottom body(D) and tighten with screw(D1)


Place metal cap(D3) to the metal tube(D2) and secure with metal finial(D4)

Twist bottom frame(D) to the top frame(B)

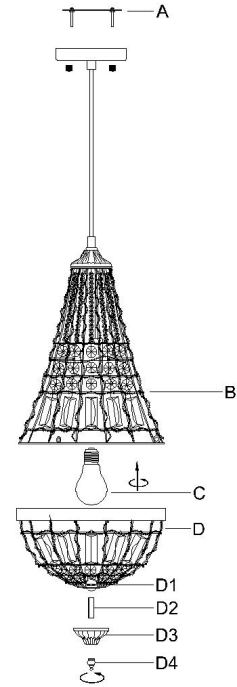


## Step 2 Wire Connetion

Connect,Hot,Black or Red outlet Supply Wire to:	Connect,Neutral,White Outlet Supply Wire to:
Black	White
* Parallel Cord(round & smooth)	* Parallel Cord(square& ridged)
Clear,Brown,Gold or Black without Tracer(colored stripes)	Clear,Brown,Gold or Black without Tracer(colored stripes)
Insulated Wire(not green) with copper metal conductor	Insulated Wire(not green) with Silver metal conductor




\*Note: When parallel wire(SPT I & SPT II) is used.The neutral wire is square shaped and ridged and the hot wire will be round in shape and smooth.(See illustration on left.)



## Step 3

Installing the mounting bar(A) with mounting screw(A1) to the canopy and tighten with screw nut (B1)

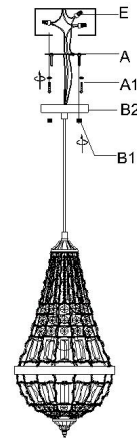

## Step 4

Consult a qualified electrician to ensure correct branch circuit conductor



ENJOY YOUR LAMP