

SAFAVIEH LIGHTING

Assembly Instruction

CAUTION: Read instruction carefully and turn electricity off at main circuit breaker panel before beginning installation.

ITEM#:LIT4447A



Care and Cleaning



To clean the outside of the fixture, use a dry or slightly dampened clean cloth (use clean water, never a solvent) to wipe the surface of the fixture.

To clear the inside of the fixture, first disconnect power to the fixture by turning off the circuit breaker or by removing the fuse at the fuse box. Next, use a dry or slightly dampened clean cloth (use clean water, never a solvent) to wipe the interior surface of the fixture.

Do not use any cleaners with chemical, solvents or harsh abrasives. Use Only a dry soft cloth to dust or wipe carefully.

Estimated Assembly Time: 30 minutes

Part List and Hardware List

PIECE	DESCRIPTION	PICTURE	QUANTITY	PIECE	DESCRIPTION	PICTURE	QUANTITY
A	Lamp body		1X	E	wire connector		3X
B	Knurled nut		2X	F	Bulb		1X
C	Mounting bracket		1X	G	Screwdriver		1X
D	Machine screw		2X	H	Set screw		1X


Installation

Step 1

Unpack all parts from cartons carefully.


Fix the mounting bracket (C) to the outlet box with machine screw (D).

If needed, take out the set screw (H) and adjust the length of cable, then use the screwdriver (G) to tighten it.

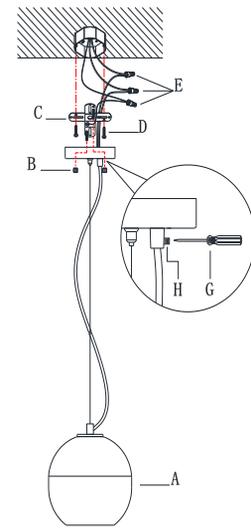


Step 2 Wire connection

Connect, Hot, Black or Red outlet Supply Wire to:	Connect, Neutral, White Outlet Supply Wire to:
Black	White
*Parallel Cord (round & smooth)	*Parallel Cord (square & ridged)
Clear, Brown, Gold or Black without Tracer (colored stripes)	Clear, Brwn, Gold or Black without Tracer (colored stripes)
Insulated Wire (not green) with copper metal conductor	Insulated Wire (not green) with Silver metal conductor



*Note: When parallel wire (SPT I & SPT II) is used. The neutral wire is square shaped and ridged and the hot wire will be round in shape and smooth. (See illustration on left)



Grounding Instructions:

- For installation in the United States: Wrap ground wire from outlet box around green ground screw on mounting bracket, no less than 2" from wire end. Tighten ground screw. If fixture is supplied with a ground wire, connect to outlet ground wire with a wire.
- For installation in Canada: If fixture is supplied with ground wire, wrap ground wire around green grounding screw on mounting bracket. Tighten ground screw.

Step 3

Orient the Lamp body (A) so that the mounting screws protruding from the mounting bracket go into the holes in the canopy, then secure it with the provided knurled nut (B).

Step 4

Install bulbs (F). Be sure to use bulb with wattage fixture. Always make sure that electrical current is turned off before changing bulbs.

PLEASE USE ON/OFF TYPE "A" BULB MAX 40-WATT OR CFL BULB 9-WATT. THERE IS CFL 9-WATT BULB IN THE BOX.

Step 5

Consult a qualified electrician to ensure correct branch circuit conductor

ENJOY YOUR LAMP

