




Assembly Instruction

CAUTION: Read instruction carefully and turn electricity off at main circuit breaker panel before beginning installation.

ITEM#:LIT4492A

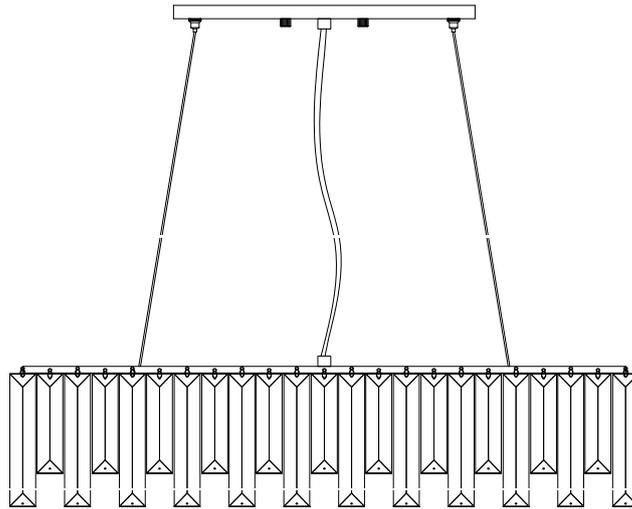

Care and Cleaning

To clean the outside of the fixture, use a dry or slightly dampened clean cloth(use clean water, never a solvent) to wipe the surface of the fixture.

To clear the inside of the fixture, first disconnect power to the fixture by turning off the circuit breaker or by removing the fuse at the fuse box. Next, use a dry or slightly dampened clean cloth(use clean water, never a solvent) to wipe the interior surface of the fixture

Do not use any cleaners with chemical, solvents or harsh abrasives. Use Only a dry soft cloth to dust or wipe carefully.

Estimated Assembly Time:30 minutes

Part List and Hardware List

PIECE	DESCRIPTION	PICTURE	QUANTITY	PIECE	DESCRIPTION	PICTURE	QUANTITY	PIECE	DESCRIPTION	PICTURE	QUANTITY
A	Wire Nut		3X	D1	Collar		1X	E	Canopy Nut		2X
B	Mounting Plate		1X	D2	Allen Screw		1X	F	Decoration		(26+1)X
C	Mounting Screw		2X	D3	Allen Wrench		1X	G	Decoration		(26+1)X
D	Lampbody		1X	D4	Cable Holder		2X	H	Bulb		3X


Installation

Step 1

Unpack all parts from cartons carefully.


Separate the Mounting Plate(B) from the Canopy by removing the Canopy Nut(E) anti-clockwise.

The adjustment or shortening of the lighting fixtures suspension length is only needed if the factory set Steel Cable length is not appropriate for your installation. Adjust Steel Cables while pressing Cable Holder(D1). Each Steel Cable length should be same to make the Light Fixture (K) horizontal. Adjust the power cord length by loose the Allen Screw(D2) of the Collar(D1) with the help of the Allen wrench (D3), Tighten the Allen Screw(D2) if the power cord length is desired. Mark sure the power cord should be longer than the steel cable.

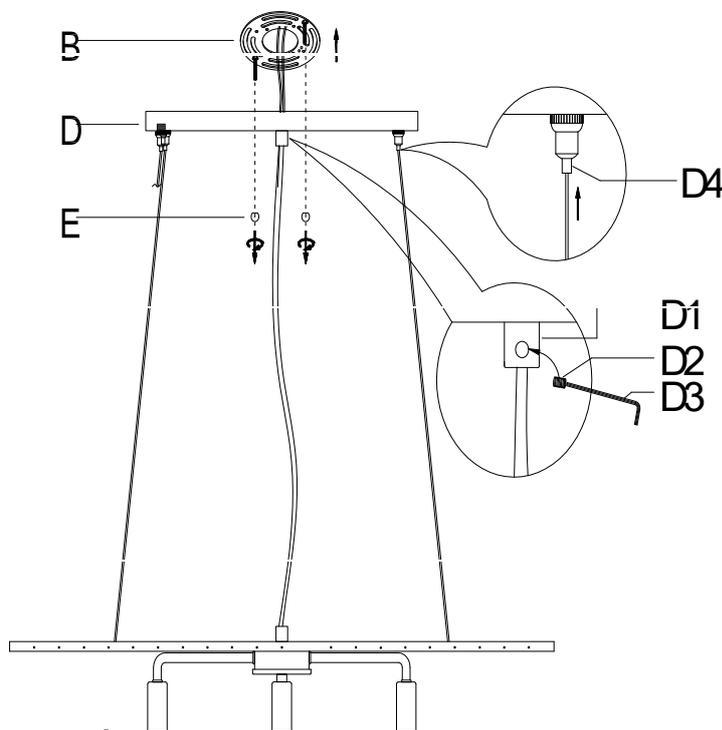


Step 2 Wire connection

Connect,Hot,Black or Red outlet Supply Wire to:	Connect,Neutral,White Outlet Supply Wire to:
Black	White
*Parallel Cord(round&smooth)	*Parallel Cord(square&ridged)
Clear,Brown,Gold or Black without Tracer(colored stripes)	Clear,Brwn,Gold or Black without Tracer(colored stripes)
Insulated Wire(not green)with copper metal conductor	Insulated Wire(not green)with Silver metal conductor



*Note: When parallel wire(SPTI&SPTII)is used. The neutral wire is square shaped and ridged and the hot wire will be round in shape and smooth.(See illustration on left)

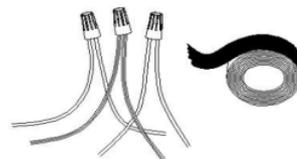

Grounding Instructions:


a) For installation in the United States: Wrap ground wire from outlet box around green ground screw on mounting bracket, no less than 2" from wire end. Tighten ground screw. If fixture is supplied with a ground wire, connect to outlet ground wire with a wire connector.

b) For installation in Canada: If fixture is supplied with ground wire, wrap ground wire around green grounding screw on mounting bracket. Tighten ground screw.

Step 3

Installing the Mounting Plate(B) to the junction box with Mounting Screw (C)


Attach the Canopy to the junction box and fix it by turning the Canopy Nut (E) clockwise.

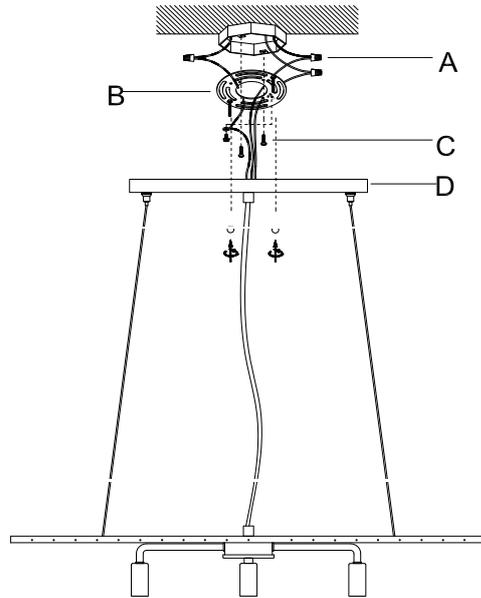

Step 4

Insert the bulb (H) into the Socket

Hang the Decoration(F) and Decoration(G) to the Lampbody(D) as shown below.

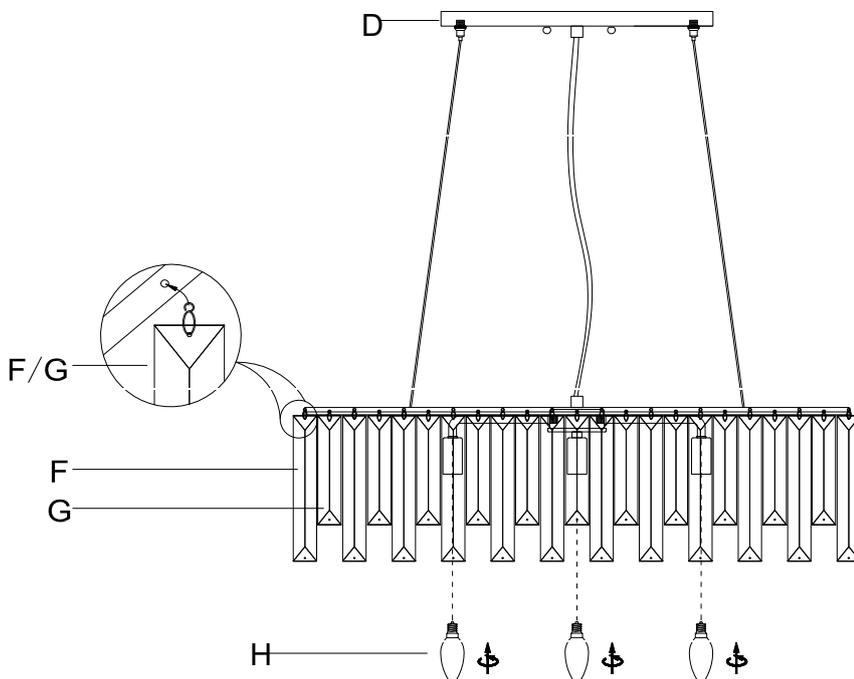

**PLEASE USE ON/OFF TYPE "B" BULB MAX 40-WATT OR CFL BULB MAX 9-WATT
THERE ARE 3PCS 25W BULB IN THE BOX.**

Step 5

Consult a qualified electrician to ensure correct branch circuit conductor.

ENJOY YOUR LAMP