




SAFAVIEH LIGHTING

Assembly Instruction

CAUTION: Read instruction carefully and turn electricity off at main circuit breaker panel before beginning installation.

ITEM#:PND4014A

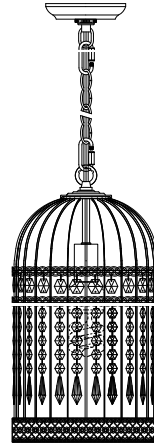

Care and Cleaning













To clean the outside of the fixture, use a dry or slightly dampened clean cloth(use clean water, never a solvent)to wipe the surface of the fixture.

To clear the inside of the fixture, first disconnect power to the fixture by turning off the circuit breaker or by removing the fuse at the fuse box. Next, use a dry or slightly dampened clean cloth(use clean water, never a solvent) to wipe the interior surface of the fixture

Do not use any cleaners with chemical, solvents or harsh abrasives. Use Only a dry soft cloth to dust or wipe carefully.

Estimated Assembly Time:30 minutes

Part List and Hardware List


PIECE	DESCRIPTION	PICTURE	QUANTITY	PIECE	DESCRIPTION	PICTURE	QUANTITY
A	Wire Nut		3X	H	Closable link/cap		2X
B	Mounting Plate		1X	I	Fixture Loop		1X
C	Acrylic strand		28X	J	Chain		1X
D	Mounting Screw		2X	K	Lamp Boby		1X
E	Canopy		1X	L	Socket		1X
F	Hanging Loop		1X	M	Bulb		1X
G	Canopy Nut		1X				

Installation

Step 1


Unpack all parts from cartons carefully.

Attach the Acrylic Strands(C) onto the Lace of the Lamp Body(K) as diagram.

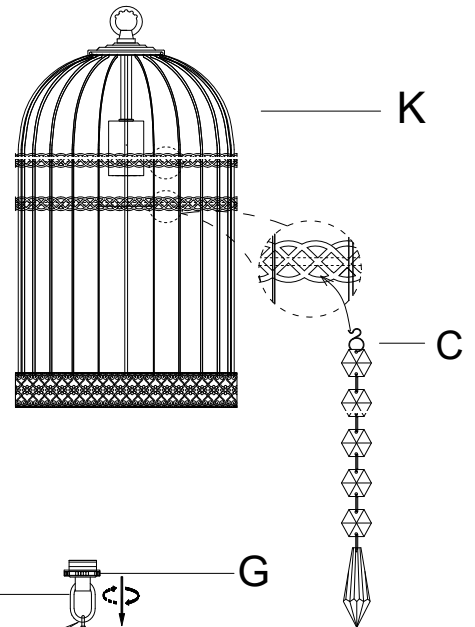

Step 2

Screw the Chain(J) to the Hanging Loop(F) and the Fixture Loop (I) with Closable link/cap (H) as diagram.

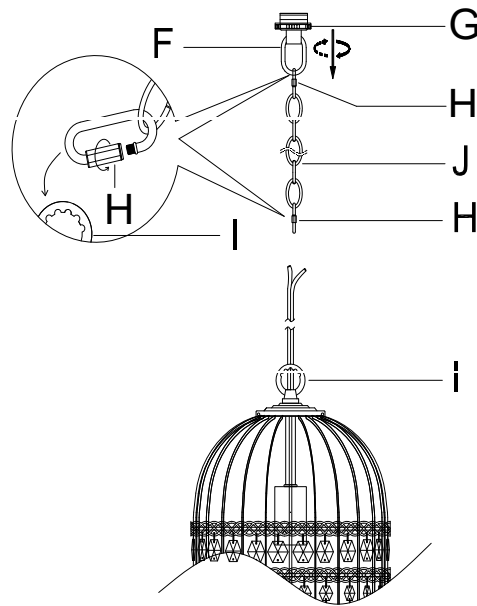


Step 3

Weave the 2 wire power cord and bare ground wire through every other loop to the top of chain(J),center holes of Hanging Loop(F)&Canopy(E)&Mounting Plate(B) as diagram.


Insert the threaded tube of the Mounting Plate(B) into the center hole of the Hanging Loop(F),rotate the Mounting Plate(B) clockwise till tight.

Slide the Canopy Nut(G) then the Canopy(E) to the end of the Chain(J).

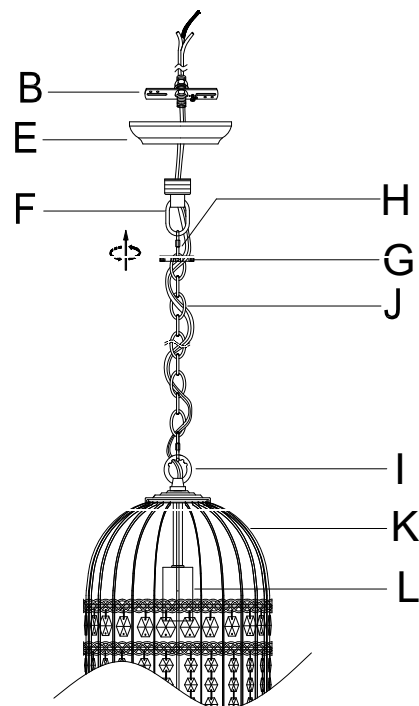

Step 4 Wire connection

Connect, Hot, Black or Red outlet Supply Wire to:	Connect, Neutral, White Outlet Supply Wire to:
Black	White
*Parallel Cord(round&smooth)	*Parallel Cord(square&ridged)
Clear, Brown, Gold or Black without Tracer(colored stripes)	Clear, Brwn, Gold or Black without Tracer(colored stripes)
Insulated Wire(not green)with copper metal conductor	Insulated Wire(not green)with Silver metal conductor



*Note: When parallel wire(SPTI&SPTII)is used. The neutral wire is square shaped and ridged and the hot wire will be round in shape and smooth.(See illustration on left)



Grounding Instructions:

- For installation in the United States: Wrap ground wire from outlet box around green ground screw on mounting bracket, no less than 2" from wire end. Tighten ground screw. If fixture is supplied with a ground wire, connect to outlet ground wire with a wire connector.
- For installation in Canada: If fixture is supplied with ground wire, wrap ground wire around green grounding screw on mounting bracket. Tighten ground screw.


Step 5

Attach the Mounting Plate (B) onto the junction box by inserting two Mounting Screws (D) and turning clockwise till tight.

Slide the Canopy (E) upward along the chain(J) till the ceiling surface. Fix the Canopy(E) by rotating the Canopy Nut(G)clockwise to engage it with the threaded portion of the Hanging Loop (F) until secure. Do not over tighten this nut.

Insert the bulb(M) into the socket(L) until secure. DO NOT EXCEED THE SPECIFIED WATTAGE.

**PLEASE USE TYPE "A" BULB MAX 100-WATT OR EDISON BULB MAX 100-WATT OR CFL BULB MAX 23-WATT OR LED MAX 12-WATT
THERE IS 1*4-WATT LED BULB IN THE BOX.**

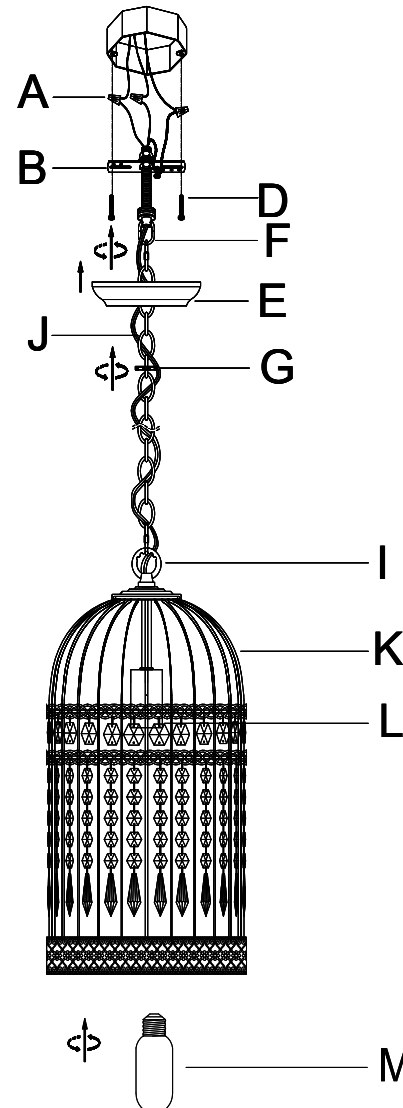

Step 6

Consult a qualified electrician to ensure correct branch circuit conductor

ENJOY YOUR LAMP