


SAFAVIEH

LIGHTING

Assembly Instruction

CAUTION: Read instruction carefully and turn electricity off at main circuit breaker panel before beginning installation.

ITEM#: PND4029A

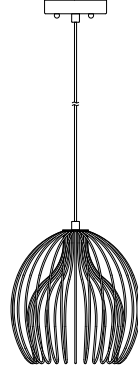

Care and Cleaning







To clean the outside of the fixture, use a dry or slightly dampened clean cloth (use clean water, never a solvent) to wipe the surface of the fixture.

To clear the inside of the fixture, first disconnect power to the fixture by turning off the circuit breaker or by removing the fuse at the fuse box. Next, use a dry or slightly dampened clean cloth (use clean water, never a solvent) to wipe the interior surface of the fixture.

Do not use any cleaners with chemical, solvents or harsh abrasives. Use Only a dry soft cloth to dust or wipe carefully.

Estimated Assembly Time: 30 minutes


Part List and Hardware List

PIECE	DESCRIPTION	PICTURE	QUANTITY	PIECE	DESCRIPTION	PICTURE	QUANTITY
A	Wire Nut		3X	D	Lamp Body		1X
B	Mounting Plate		1X	E	Canopy Nut		2X
C	Mounting Screw		2X	F	Bulb		1X

Installation


Step 1

Separate the Mounting Plate(B) from the Canopy of the Lamp Body(D) by removing the Canopy Nuts(E) anti-clockwise.




Step 2

Attach the Mounting Plate (B) onto the junction box and fix it by inserting the Mounting Screws(C) clockwise till tight.

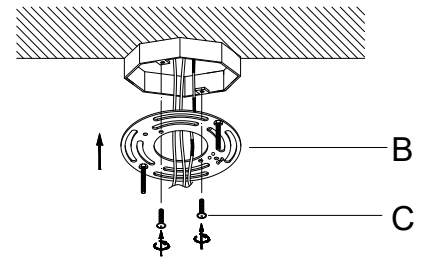

Step 3 Wire connection

Connect,Hot,Black or Red outlet Supply Wire to:	Connect,Neutral,White Outlet Supply Wire to:
Black	White
*Parallel Cord(round&smooth)	*Parallel Cord(square&ridged)
Clear,Brown,Gold or Black without Tracer(colored stripes)	Clear,Brwn,Gold or Black without Tracer(colored stripes)
Insulated Wire(not green)with copper metal conductor	Insulated Wire(not green)with Silver metal conductor



*Note: When parallel wire(SPTI&SPTII)is used. The neutral wire is square shaped and ridged and the hot wire will be round in shape and smooth.(See illustration on left)

Grounding Instructions:

- For installation in the United States: Wrap ground wire from outlet box around green ground screw on mounting bracket, no less than 2" from wire end. Tighten ground screw. If fixture is supplied with a ground wire, connect to outlet ground wire with a wire connector.
- For installation in Canada: If fixture is supplied with ground wire, wrap ground wire around green grounding screw on mounting bracket. Tighten ground screw.

Step 4

Attach the Canopy of the Lamp Body(D) over the Mounting Plate (B) and fix it by turning the Canopy Nuts(E) clockwise till tight.

Insert the bulb(F) into the socket of the Lamp Body(D) until secure.


DO NOT EXCEED THE SPECIFIED WATTAGE.

PLEASE USE TYPE"A" BULB MAX 60-WATT OR EDISON BULB MAX 60-WATT OR CFL BULB MAX 13-WATT OR LED MAX 9-WATT

THERE IS 1* 4-WATT LED BULB IN THE BOX

Step 5

Consult a qualified electrician to ensure correct branch circuit conductor

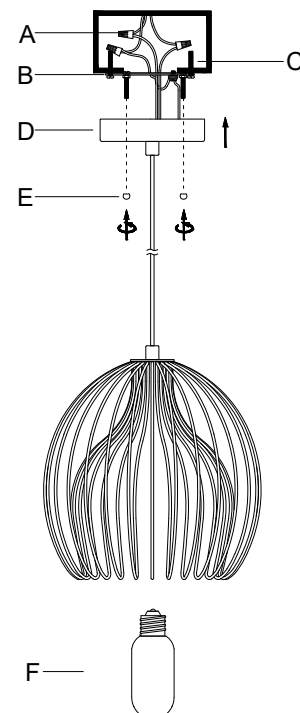

ENJOY YOUR LAMP