WARNING

- * Switch off the main electrical supply from the main fuse box / circuit.
- * Breaker before installation.
- * Inspect item carefully before attempting to install.
- * If there is any damages or obvious defects, do not install.
- * Item may not be returned once it has been installed.

CARE AND MAINTENANCE

- * To clean the outside of the fixture, use a dry or slightly dampened clean cloth (use clean water, never a solvent) to wipe the surface of the fixture.
- * To clean the inside of the fixture, first disconnect power to the fixture by turning off the circuit breaker or by removing the fuse at the fuse box. Next, use a dry or slightly dampened clean cloth (use clean water, never a solvent) to wipe the interior surface of the fixture.
- * Do not use any cleaners with chemical, solvents or harsh abrasives. Use only a dry soft cloth to dust or wipe carefully.

NOTICE& IMPORTANT SAFETY INSTRUCTIONS

- ** WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN *** * Please make sure that you have all parts indicated before you begin assembly of this item
- * This item should be assembled on a soft surface to prevent scratching the finish during assembly
- * To reduce the risk of fire, electrical shock or injury to persons or property, please follow the guideline below for safe use and installation
- *The external flexible cable or cord of this lamp cannot be replaced If the cord is damaged, the lamp shall be destroyed

Part List and Hardware List


PIECE	DESCRIPTION	PICTURE	QUANTITY	PIECE	DESCRIPTION	PICTURE	QUANTITY
А	Wire Nut		3X	G	Closable Link		2X
В	Mounting Screw		2X	Н	Fixture Loop+tube		2X
С	Mounting Plate	<u> </u>	1X	I	Twine tube		2X
D	Bulb		5X	J	long tube		4X
E	Canopy	8 8	1X	К	shade		1X
F	Canopy Screw	ama)	4X	L	Socket Assembly	1/2	1X



Model#: PND4188A

Product Dimensions: 39.75"L x 11.75"W x


18-48"H




PREPARATION

- * Before beginning assembly of product, make sure all parts are present. Compare parts with package contents list and hardware contents list.
- * If any part is missing or damaged, do not attempt to assemble the product.
- * Estimated Assembly Time: 30 minutes.
- * If you are having difficulty, our friendly Customer Care team is always here to help. Please email customersupport@safavieh.com

NOTE: PLEASE USE TYPE"A" BULB MAX 40-WATT OR LED BULB MAX 9-WATT, THERE ARE 5*LED 4-WATT BULBS IN THE BOX

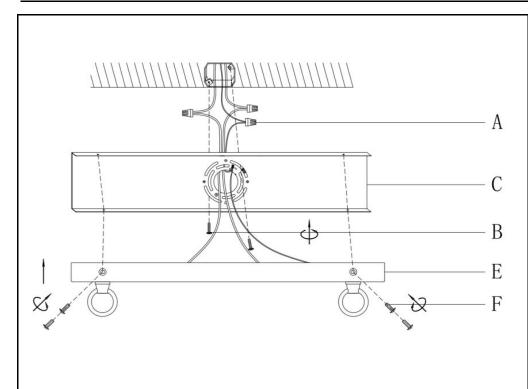

Step 1: Unpack all parts from cartons carefully. Seperate the Mounting Plate(C) from the Canopy(E) by turning the Canopy Screw | Step 2: Insert the fixture wire through the long tubes(J), Twine tube(I), Fixture (F) anti-clockwise. Install the Mounting Plate(C) to the junction box with Mounting Screw (B).

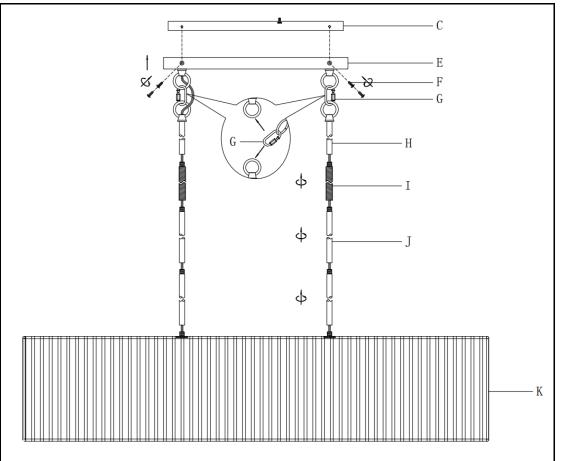

Loop+tube (H) in turn to get desired length. Rotate each part clockwise till tight. Connect Fixture Loop+tube (H) and Canopy(E) with the Closable Link (G).




Step 3: Wire connection

Connect fixture neutral wire (ribbed) to the outlet box neutral wire (usually white) using a wire nut. Connect fixture hot wire (smooth with markings) to the outlet box hot wire (usually black) using a wire nut.

CAUTION: Do not reverse the hot and neutral connections

Grounding Instructions:

Wrap ground wire from outlet box around green ground screw on mounting bracket, no less than 2" from wire end. Tighten ground screw. If fixture is supplied with a ground wire, connect to outlet ground wire with a wire nut.

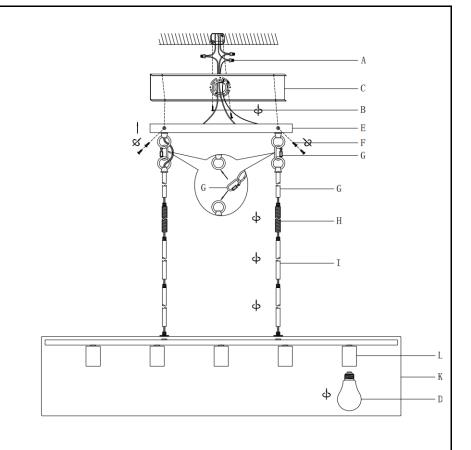

Step 4: Attach the Canopy(E) to the junction box and fix it by turning the Canopy Screw(F) clockwise. Insert the bulbs (D) into the Sockets(L).