WARNING

* Switch off the main electrical supply from the main fuse box / circuit breaker before installation.
* Inspect item carefully before attempting to install.
* If there is any damages or obvious defects, do not install.
* Item may not be returned once it has been installed.


CARE AND MAINTENANCE

* To clean the outside of the fixture, use a dry or slightly dampened clean cloth (use clean water, never a solvent) to wipe the surface of the fixture.
* To clean the inside of the fixture, first disconnect power to the fixture by turning off the circuit breaker or by removing the fuse at the fuse box. Next, use a dry or slightly dampened clean cloth (use clean water, never a solvent) to wipe the interior surface of the fixture.
* Do not use any cleaners with chemical, solvents or harsh abrasives. Use only a dry soft cloth to dust or wipe carefully.

NOTICE& IMPORTANT SAFETY INSTRUCTIONS


** WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN **
* Please make sure that you have all parts indicated before you begin assembly of this item
* This item should be assembled on a soft surface to prevent scratching the finish during assembly
* To reduce the risk of fire, electrical shock or injury to persons or property, please follow the guideline below for safe use and installation
*The external flexible cable or cord of this lamp cannot be replaced
If the cord is damaged, the lamp shall be destroyed

Part List and Hardware List

PIECE	DESCRIPTION	PICTURE	QUANTITY	PIECE	DESCRIPTION	PICTURE	QUANTITY
A	Wire connector		3X	G	Lamp body		1X
B	Mounting bracket		1X	H	Buckle screw		1X
C	Ground screw		1X	J	Lamp shade		1X
D	Metal plate		2X	K	Socket ring		1X
E	Machine screw		2X	L	Bulb		1X
F	Mounting screw		2X				

SAFAVIEH LIGHTING

Model#: PND4202
Product Dimensions: 19.75"Lx19.75"Wx14-73"H

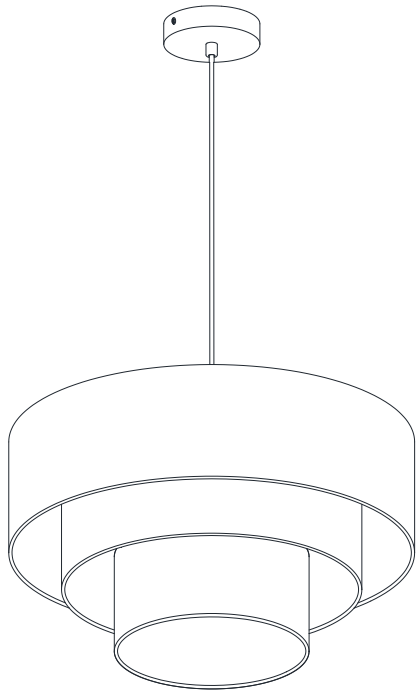

PREPARATION

* Before beginning assembly of product, make sure all parts are present. Compare parts with package contents list and hardware contents list.
* If any part is missing or damaged, do not attempt to assemble the product.
* Estimated Assembly Time: 20 minutes.
* Tools Required for Assembly (not included): Screwdriver, Junction box
* If you are having difficulty, our friendly Customer Care team is always here to help. Please email **customersupport@safavieh.com**


PLEASE USE ON/OFF TYPE "A"BULE MAX 100W-WATT OR CFL BULB MAX 13-WATT OR LED BULB MAX 12-WATT THERE IS LED 8-WATT BULB IN THE BOX.

1. Fix the mounting bracket(B) to the outlet box with machine screw(E).

2.Loosen the buckle screw(H), then shorten or extend the power cord to the required length, then lock the buckle screw again.

3. Make wire connections, with wire connectors(A), following the reference chart listed below.

Connect, Hot, Black or Red Outlet Supply Wire to:	Connect, Neutral, White Outlet Supply Wire to:
Black	White
* Parallel Cord (round & smooth)	* Parallel Cord (square & ridged)
Clear, Brown, Gold or Black without Tracer (colored stripes)	Clear, Brown, Gold or Black with Tracer (colored stripes)
Insulated Wire (not green) with copper metal conductor	Insulated Wire (not green) with Silver metal conductor.



*Note: When parallel wire (SPT I & SPT II) is used. The neutral wire is square shaped and ridged and the hot wire will be round in shape and smooth. (See Illustration on left.)

Grounding Instructions:

a) For installation in the United States: Wrap ground wire from outlet box around green ground screw(C) on mounting bracket, no less than 2" from wire end. Tighten ground screw. If fixture is supplied with a ground wire, connect to outlet ground wire with a wire connector.

b) For installation in Canada: If fixture is supplied with ground wire, wrap ground wire around green grounding screw on mounting bracket. Tighten ground screw.

4.Carefully remove packaging from fixture,fix the lamp body(G) to mounting bracket(B) using mounting screw(F).

5.Fix the lamp shade (J) to the lamp body (G) with the socket ring (K) .then adjust the height of the lamp body(G) by loosening the screws on the fixture and tighten it again.

6.Install the E26 bulb (L) by screwing it into the lamp body (G) socket.

