

## SAFETY INFORMATION

Please read and understand this entire manual before attempting to assemble, operate or install the product.

### WARNING











- Turn off electricity at main fuse box (or circuit breaker box) before beginning installation by removing fuse (or switching off circuit breaker).
- Be careful not to damage or cut the wire insulation (covering) during fixture installation. Do not permit wires to contact any surface having a sharp edge. To do so may damage or cut the wire insulation, which could cause serious injury or death from electric shock.

### CAUTION

• All electrical connections must be in agreement with local codes, ordinances or the national electric code (NEC). Contact your municipal building department to learn about your local codes, permits and/or inspections.

- Risk of fire – most dwellings built before 1985 have supply wire rated for 140°F/60°C. Consult a qualified electrician before installation.
- Do not connect this fixture to an electrical system that does not provide a means for equipment grounding. Never use a fixture in a two-wire system that is not grounded. If you are not sure your lighting system has a grounding means, do not attempt to install this fixture. Contact a qualified, licensed electrician for information with regards to proper grounding methods as required by the local electrical code in your area.
- If a dimmer control switch is used with this fixture, obtain professional advice to determine the correct type and electrical rating required.

## Part List and Hardware List


PIECE	DESCRIPTION	PICTURE	QUANTITY	PIECE	DESCRIPTION	PICTURE	QUANTITY
A	Bracket		X1	G	Glass shade		X4
HW1	Phillips screw Hex bolt 8#-32N x 25 MM		X2	H	Crystal shade		X4
C	P4 wire nut		X3	I	Acrylic convex lens		X4
D	Green screw		X1	J	Wrench		X1
E	Lamp body		X1				
F	Final		X1				

 **SAFAVIEH**  
L I G H T I N G

Model#:PND6010A

AC 120V 60HZ LED 4x5W

Product Dimensions:D15.35" X H82.28"

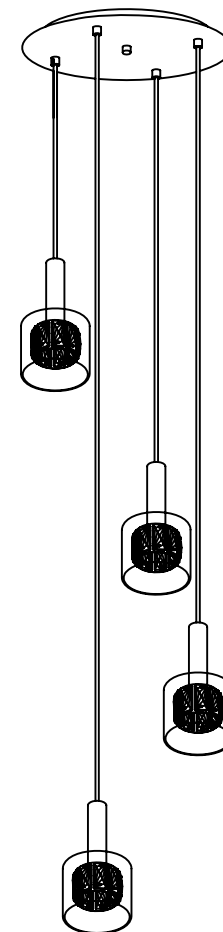


PREPARATION

Before beginning assembly of product, make sure all parts are present. Compare parts with package contents list and hardware contents list. If any part is missing or damaged, do not attempt to assemble the product.  
Estimated Assembly Time: 20 minutes.

Carefully remove all lamp parts from the box, lay all parts on a flat surface. please see list of items included in box below.

- 1. Make sure the power supply is off before installation.
- 2. Fix bracket(A) to the outlet box by **phillips screw(HW1)**.
- 3. Make wire connections,with wire connectors(C),following the reference chart listed below.


Connect,Hot,Black or Red outlet Supply Wire to:	Connect,Neutral,White Outlet Supply Wire to:
Black	White
*Parallel Cord(round&smooth)	*Parallel Cord(square&ridged)
Clear,Brown,Gold or Black without Tracer(colored stripes)	Clear,Brwn,Gold or Black without Tracer(colored stripes)
Insulated Wire(not green)with copper metal conductor	Insulated Wire(not green)with Silver metal conductor



\*Note: When parallel wire(SPTI&SPTII)is used. The neutral wire is square shaped and ridged and the hot wire will be round in shape and smooth.(See illustration on left)

Grounding Instructions:

- a) For installation in the United States: Wrap ground wire from outlet box around green ground screw on mounting bracket, no less than 2" from wire end. Tighten ground screw. If fixture is supplied with a ground wire, connect to outlet ground wire with a wire connector.
  - b) For installation in Canada: If fixture is supplied with ground wire, wrap ground wire around green grounding screw on mounting bracket. Tighten ground screw.2/3
- 4. Adjust the cable to the right length. Move the lamp body(E) to the bracket position,lock the lamp body with final(F) after align with the hole position,tear off the protective film.
  - 5. Put glass shade(G)/crystal shade(H) to socket, fix acrylic convex lens(I) on socket with wrench(J).

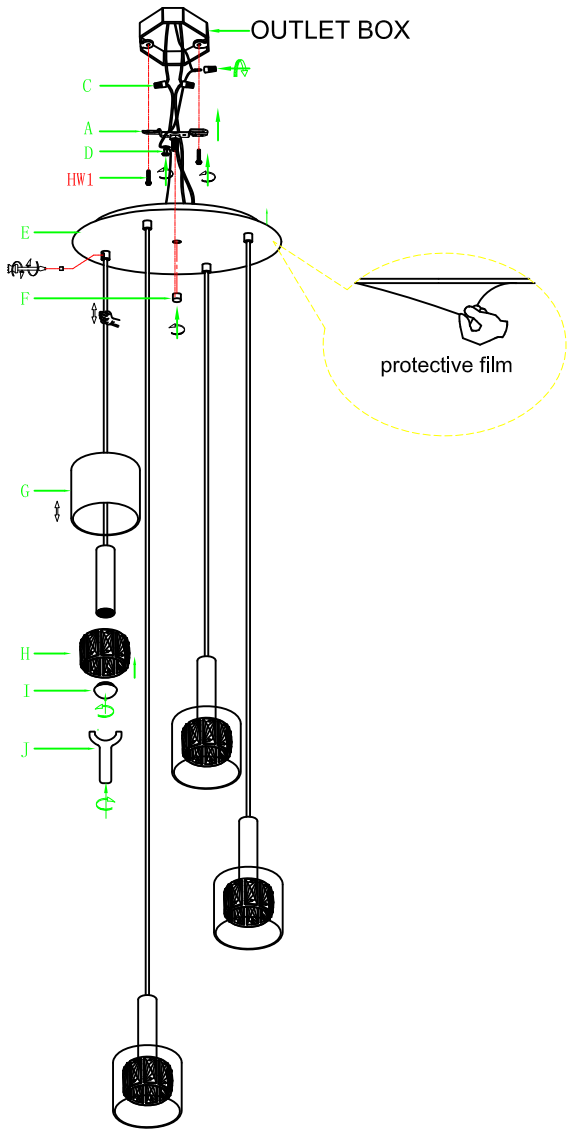

ENJOY YOUR LAMP