

Assembly Instruction

CAUTION: Read instruction carefully and turn electricity off at main circuit breaker panel before beginning installation.

ITEM#: CHA4032A



Care and Cleaning

To clean the outside of the fixture, use a dry or slightly dampened clean cloth (use clean water, never a solvent) to wipe the surface of the fixture.

To clear the inside of the fixture, first disconnect power to the fixture by turning off the circuit breaker or by removing the fuse at the fuse box. Next, use a dry or slightly dampened clean cloth (use clean water, never a solvent) to wipe the interior surface of the fixture.

Do not use any cleaners with chemical, solvents or harsh abrasives. Use Only a dry soft cloth to dust or wipe carefully.

Estimated Assembly Time: 30 minutes.

Part List and Hardware List

PIECE	DESCRIPTION	PICTURE	QUANTITY	PIECE	DESCRIPTION	PICTURE	QUANTITY	PIECE	DESCRIPTION	PICTURE	QUANTITY
A	Wire Nut		3X	F	Canopy Nut		1X	K	Metal Screw		6X
B	Mounting Plate		1X	G	Chain		1X	L	Resin Arms		6X
C	Mounting Screw		2X	H	Closable link/ cap		6X	M	Bulb		6X
D	Hanging Loop		1X	I	Chain		2X				
E	Canopy		1X	J	Fixture Frame		1X				

Installation

Step 1


Unpack all parts from cartons carefully. Remove the silicone caps from the metal screws in the Resin Arms (L) firstly. Then fix the Resin Arm (L) to the Fixture Frame (J) with Metal Screw (K) as diagram.

Step 2

Connect the Chain (I) to the Fixture Frame (J) with Closable link/cap (H) as diagram.

Screw the Chain (G) to the Hanging Loop (D) and the loop of the Fixture Frame (J) with Closable link/cap (H) as diagram.

Weave the 2 wire power cord and bare ground wire through every other loop to

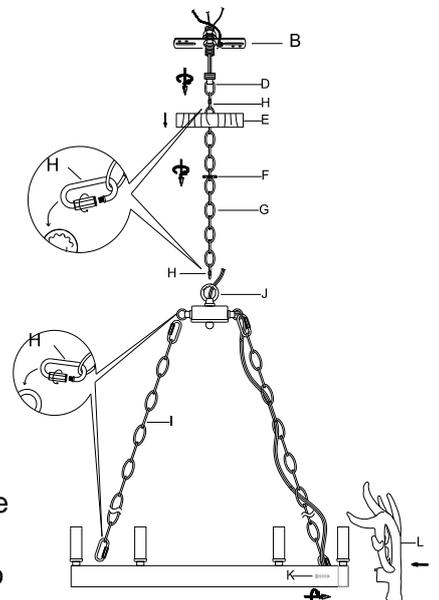


the chain (G), center holes of Hanging Loop (D), Canopy (E) & Mounting Plate (B) as diagram.
 Sepetate the Mounting Plate (B) from the Canopy (E) by unscrewing the Canopy Nut (F) anti-clockwise.
 Slide the Canopy Nut (F) then the Canopy(E) to the end of the Chain (G).

Step 3 Wire connection

Connect,Hot,Black or Red outlet Supply Wire to:	Connect,Neutral,White Outlet Supply Wire to:
Black	White
*Parallel Cord(round&smooth)	*Parallel Cord(square&ridged)
Clear,Brown,Gold or Black without Tracer(colored stripes)	Clear,Brwn,Gold or Black without Tracer(colored stripes)
Insulated Wire(not green)with copper metal conductor	Insulated Wire(not green)with Silver metal conductor

*Note: When parallel wire(SPTI&SPTII) is used. The neutral wire is square shaped and ridged and the hot wire will be round in shape and smooth.(See illustration on left).

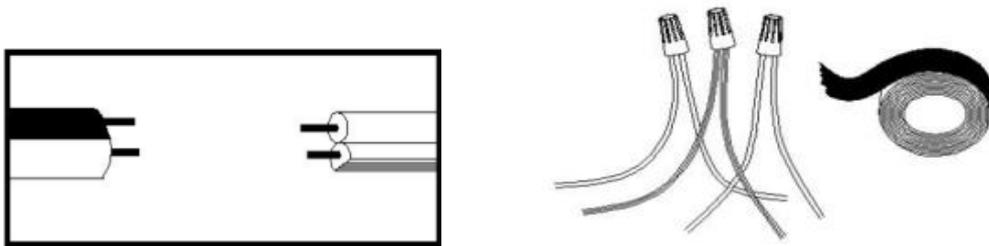

Grounding Instructions:

- For installation in the United States: Wrap ground wire from outlet box around green ground screw on mounting bracket, no less than 2" from wire end. Tighten ground screw. If fixture is supplied with a ground wire, connect to outlet ground wire with a wire connector.
- For installation in Canada: If fixture is supplied with ground wire, wrap ground wire around green grounding screw on mounting bracket. Tighten ground screw.

Step 4

Fix the Mounting Plate (B) to the junction box with Mounting Screw (C). Attach the Canopy (E) to the junction box and fix it by turning the Canopy Nut (F) clockwise. Insert the bulb (M) into the Socket.

**PLEASE USE TYPE "B" BULB MAX 40-WATT
 OR CFL BULB MAX 13-WATT OR LED MAX 9-WATT
 THERE ARE 6 * C35 LED 4W BULBS IN THE BOX.**

Step 5

Consult a qualified electrician to ensure correct branch circuit conductor.

ENJOY YOUR LAMP

