


# SAFAVIEH LIGHTING

## Assembly Instruction

**CAUTION:** Read instruction carefully and turn electricity off at main circuit breaker panel before beginning installation.

**ITEM#:LIT4494A**

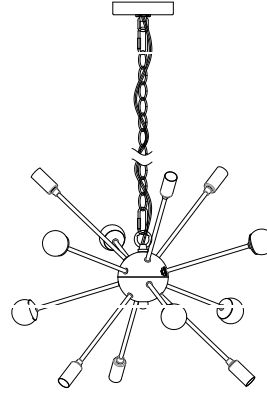

### Care and Cleaning












To clean the outside of the fixture, use a dry or slightly dampened clean cloth (use clean water, never a solvent) to wipe the surface of the fixture.

To clear the inside of the fixture, first disconnect power to the fixture by turning off the circuit breaker or by removing the fuse at the fuse box. Next, use a dry or slightly dampened clean cloth (use clean water, never a solvent) to wipe the interior surface of the fixture.

Do not use any cleaners with chemical, solvents or harsh abrasives. Use Only a dry soft cloth to dust or wipe carefully.

Estimated Assembly Time: 30 minutes

### Part List and Hardware List



| PIECE | DESCRIPTION        | PICTURE   | QUANTITY | PIECE | DESCRIPTION    | PICTURE   | QUANTITY |
|-------|--------------------|---|----------|-------|----------------|---|----------|
| A     | Mounting Plate     |  | 1X       | F     | Fixture Loop   |  | 1X       |
| B     | Canopy             |  | 1X       | G     | Lampbody       |  | 1X       |
| C     | Hanging Loop       |  | 1X       | H     | Wire Nut       |  | 3X       |
| D     | Canopy Nut         |  | 1X       | I     | Mounting Screw |  | 2X       |
| E     | Chain              |  | 1X       | J     | Bulb           |  | 6X       |
| E1    | Closable link/ cap |  | 2X       |       |                |   |          |

# Installation

## Step 1

Unpack all parts from cartons carefully.

Screw the Chain(E) to the Hanging Loop(C) of the Metal Plate(B) and the Fixture Loop(F) of the Lampbody(G) with Closable Link(E1) as diagram.

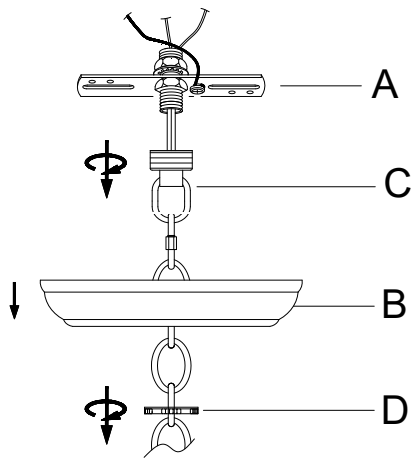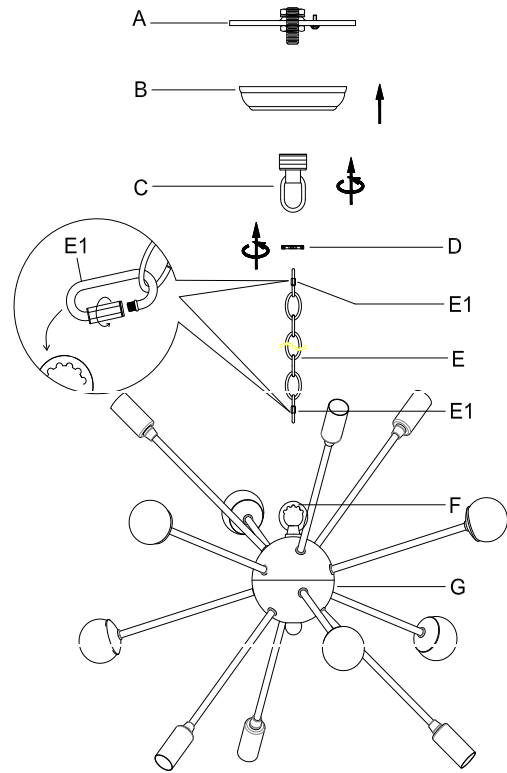


## Step 2

Separate the Mounting Plate(A) from the Canopy (B) by unscrewing the Canopy Nut(D) anti-clockwise.

## Step 3 Wire connection

| Connect, Hot, Black or Red outlet Supply Wire to:          | Connect, Neutral, White Outlet Supply Wire to:             |
|--|--|
| Black  | White  |
| *Parallel Cord(round&smooth)                               | *Parallel Cord(square&ridged)                              |
| Clear, Brwn, Gold or Black without Tracer(colored stripes) | Clear, Brwn, Gold or Black without Tracer(colored stripes) |
| Insulated Wire(not green)with copper metal conductor       | Insulated Wire(not green)with Silver metal conductor       |



\*Note: When parallel wire(SPTI&SPTII)is used. The neutral wire is square shaped and ridged and the hot wire will be round in shape and smooth.(See illustration on left)



## Grounding Instructions:


- a) For installation in the United States: Wrap ground wire from outlet box around green ground screw on mounting bracket, no less than 2" from wire end. Tighten ground screw. If fixture is supplied with a ground wire, connect to outlet ground wire with a wire connector.
- b) For installation in Canada: If fixture is supplied with ground wire, wrap ground wire around green grounding screw on mounting bracket. Tighten ground screw.

## Step 4

Fix the Mounting Plate(A) to the junction box with Mounting Screw (I).

Attach the Canopy(B) to the junction box and fix it by turning the Canopy Nut (D) clockwise.

Insert the bulb (J) into the Socket.

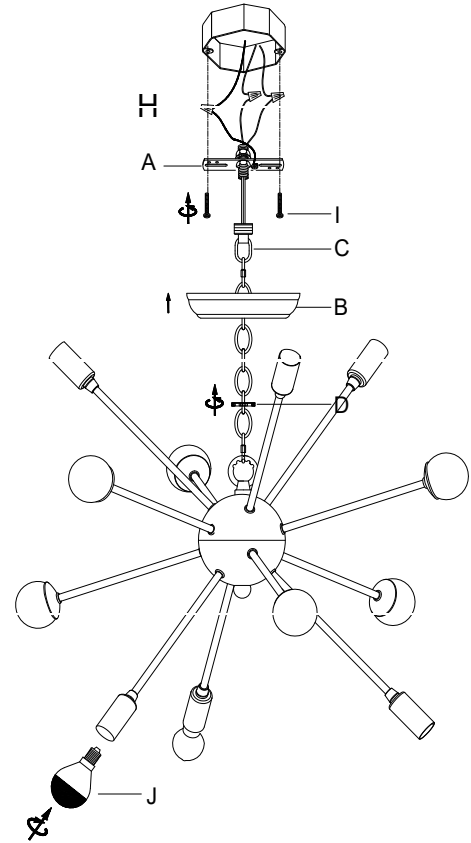

**PLEASE USE TYPE "G" BULB MAX 25-WATT  
OR LED BULB MAX 5-WATT  
THERE ARE 6PCS 2-WATT LED BULBS IN THE BOX.**

## Step 5

Consult a qualified electrician to ensure correct branch circuit conductor

ENJOY YOUR LAMP